# **Berlin.06 – Product Specification**



## CombiNation - The clever combination of all play systems

Berliner Seilfabrik offers an endless variety of play systems. But, that's not all: Since all play equipments consist of the same basic modules, the various play systems can easily be combined with each other.

The following play systems are only examples - use the countless design options to create your own unique play combination!

#### Berlin.06 - At a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487: CombiNation 95.171.611 5+ 1.57 m (5'-2") 10.8 m x 3.2 m x 2.5 m (35'-5" x 22'-7" x 8'-3") 13.9 m x 6.2 m 14.6 m x 6.9 m (47'-10" x 22'-7") 72.4 m<sup>2</sup> 85.1 m<sup>2</sup> (916.0 sf) Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: 12 pc. 5.7 m<sup>3</sup> (201.3 ft<sup>3</sup>) 2 8 Stunden Ø 0.133 m x 4.6 m (Ø 0'-6" x 15'-2") 175 kg (385.9 lbs) Upon request Lifelong




Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178

www.berliner-playequipment.com info@berliner-seilfabrik.com

# **Berlin.06 – Product Specification**

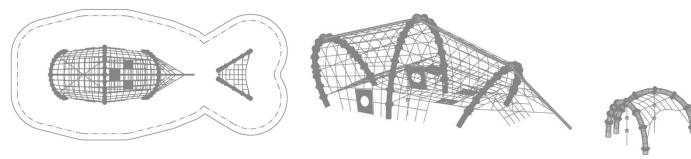

M 1:200

## Technical Data.

The following text can also be used for tenders.

#### Posts:

Steel pipes Ø 133 mm (5 ¼"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process.

### Nodes:

Frameworx-aluminum ball connectors,  $\varnothing$  250mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system, securely closed with durable ebonite caps.

## Plannar netting:

Rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic).

#### Terranos clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process.

## Ropes:

U-Rope<sup>®</sup>-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene): Ø 18 mm (11/16").

### Flubber membrane access:

Gummimatte aus haltbarem und vandalismussicherem Förderband-Gurt.

#### Climbing rope:

All ropes ø 21mm (13/16"), vertical ropes with worked-in ebonite cylinders, distance between cylinders 250-300mm (9-13/16" to 11-13/16").





Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178

www.berliner-playequipment.com info@berliner-seilfabrik.com