# **Bam.01– Product Specification**



### Bam.01

Big Greenville Rope-play house Bam.01 with an elevenfold suspended spatial net (rope diameter Ø18mm), bamboo panels, access membrane and a concave curved slide. Equipped with the AstemTT net tensioning system.

Revision: March 2016

## Bam.01 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Greenville 90.270.001 5+ 1.99 m (6'-7") 8.19 m x 4.43 m x 3.26 m (26'-11" x 14'-7" x 10'-9") 11.72 m x 7.98 m 12.07 m x 8.31 m (39'-7" x 27'-4") 60.00 m<sup>2</sup> 66.34 m<sup>2</sup> (715 sf) Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: Gross weight Certificate according to DIN EN 1176: 3 pc. 0.35 m³ (2.5 ft³) 3 10 hours 6.0 m x 2.1 m x 1.5 m (19'-9" x 6'-11" x 4'-12") 120 kg (264.6 lbs) 7.0 m³ (247.2 ft³) Lifelong 1120 kg (2470 lbs) No.: Z1A 13 06 10256 094 TÜV Product Service




Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178



# **Bam.01– Product Specification**

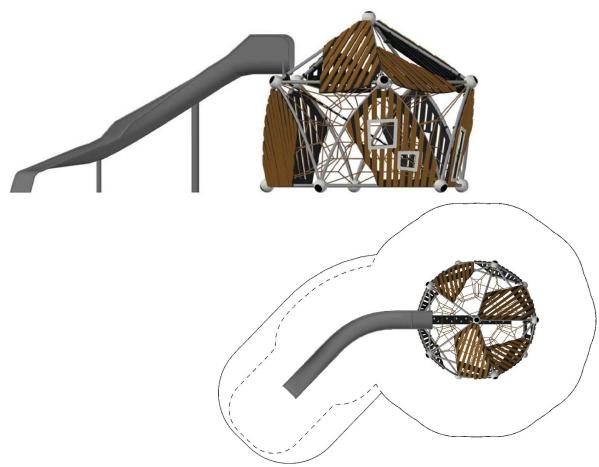

## Technical Data.

The following text can also be used for tenders.



Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178



## **Bam.01– Product Specification**

#### Tube framework:

A combination of straight and bended stainless steel Frameworx-®tubes,  $\varnothing$  60,3 m(2 3/8"), material AlSI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint.

#### Nodes:

Frameworx-aluminum ball connectors; Ø 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

#### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires, external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene). Rope-diameter  $\emptyset$  18mm (11/16").

#### Special netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings, joint-ferrule, connecting-clamps and barrel-ferrule (no plastic connections); in situ-replaceable rope strands.

#### Bamboo panels:

Bamboo strips 90 mm, (3'-1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework.

#### Attached slide:

Concave curved slide made of stainless steel AlSI304 (DIN 1.4301), the cheeks are welded with stainless steel handrails, afterwards smoothed and polished. Start height 2000mm (6'-7"); width 600mm (1'- 11 1/2"), connected to the tube at the framework with BSF-aluminum-slide clamps. The gap between the slide and the spatial net is bypassed with a flat net.

#### Access membrane:

Laying surface comprised of durable, vandal-resistant conveyor belt material and HDPE- climbing-knobs with inserted nuts.





Revision: March 2016



Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607