Boo.01– Product Specification



Boo.01

Small Greenville Rope-play house Boo.01 with an elevenfold suspended spatial net (rope diameter Ø18mm), access membrane, bamboo panels and a straight concave slide. Equipped with the AstemTT net tensioning system.

Revision: March 2016

Boo.01 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Greenville 90.280.001 3+ 1.53 m (5'-1") 7.40 m x 2.93 m x 2.53 m (24'-4" x 9'-8" x 8'-4") 10.92 m x 5.98 m 11.05 m x 6.59 m (36'-4" x 21'-8") 43.14 m² 52.95 m² (570 sf) Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: Gross weight Certificate according to DIN EN 1176: 2 pc. 0.30 m³ (10.6 ft³) 3 10 hours 5.4 m x 1.1 m x 0.6 m (17'-9" x 3'-8" x 1'-12") 100 kg (220.5 lbs) 5.0 m³ (177 ft³) Lifelong 850 kg (1874 lbs) No.: Z1A 13 06 10256 094 TÜV Product Service




Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178



Boo.01– Product Specification

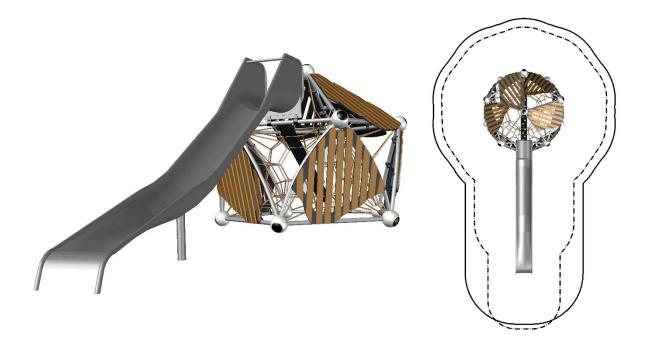

Technical Data.

The following text can also be used for tenders.

Tube framework:

A combination of straight and bended stainless steel Frameworx-®tubes, \varnothing 60,3 m(2 3/8"), material AlSI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint.

Nodes:

Frameworx-aluminum ball connectors; Ø 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires, external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene). Rope-diameter \emptyset 18mm (11/16").

Special netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings, joint-ferrule, connecting-clamps and barrel-ferrule (no plastic connections); in situ-replaceable rope strands.

Bamboo panels:

Bamboo strips 90 mm, (3'-1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework.

Attached slide:

Straight concave slide made of stainless steel AISI304 (DIN 1.4301), the cheeks are welded with stainless steel handrails, afterwards smoothed and polished. Start height 1600mm (5'-3"); width 600mm (1'- 11 1/2"), connected to the tube at the framework with BSF-aluminum-slide clamps. The gap between the slide and the spatial net is bypassed with a flat net.

Access membrane:

Laying surface comprised of durable, vandal-resistant conveyor belt material and HDPE- climbing-knobs with inserted nuts.



Revision: March 2016



Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178

