


# Bowl Swing – Product Specification



## Bowl Swing

Discover the comfortable way of swinging with the Bowl Swing and the Cup Swing.



## Bowl Swing – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>2 pc.</b>
Item Number:	<b>90.260.532</b>	Concrete Volume C20/C25:	<b>1.2 m<sup>3</sup> (43 ft<sup>3</sup>)</b>
Children's Age:	<b>3+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.7 m (5'-7")</b>	Installation Time without foundation:	<b>3 hours</b>
Length x Width x Height:	<b>3.2 m x 1.3 m x 2.9 m</b> <b>(10'-6" x 4'-4" x 9'-7")</b>	Dimensions of largest part:	<b>2.2 m x 0.3 m x 0.2 m</b> <b>(7'-3" x 1'-0" x 0'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>6.8 m x 3.2 m</b>	Weight of the heaviest part:	<b>49 kg (109 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>7.0 m x 6.9 m</b> <b>(23'-0" x 22'-8")</b>	Shipping Volume:	<b>2.7 m<sup>3</sup> (96 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>21.5 m<sup>2</sup></b>	Shipping Weight:	<b>190 kg (419 lbs)</b>
Minimum space required ASTM 1487:	<b>33.1 m<sup>2</sup> (357 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 14 09 10256 223</b> <b>TÜV Product Service</b>

## Technical Data.

The following text can also be used for tenders.

### Swing seat:

Nest swing seat made of galvanized steel tube ring, encased with shock absorbing material and wrapped with a shock-absorbing fiber rope, close-knit network of soft steel wire, steel wire strands which are covered with braided polyester yarns. Connection parts: Stainless steel V2A

### Nodes:

Framework®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps

### Posts:

Steel pipes Ø 133 mm (5 ¼"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### suspension:


U-Rope®-round strand ropes with galvanized steel cores, external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene); Ø 16 mm, connected to universal joint with steel chains



Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

www.berliner-playequipment.com  
info@berliner-seilfabrik.com

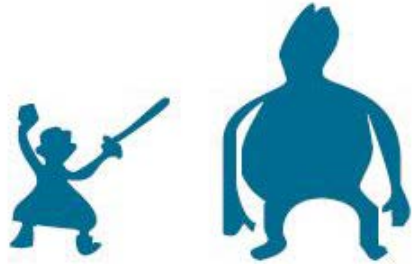

Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

[www.berliner-playequipment.com](http://www.berliner-playequipment.com)  
[info@berliner-seilfabrik.com](mailto:info@berliner-seilfabrik.com)