Combi.077 - Product Specification



Combi.077 - Greenville play house combination

Greenville tree house combination with Trii2 with access net and sliding pole, connected through closed net tunnels with an Trii3 with ladder and a long tunnel slide.

Combi.077 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487: Greenville 90.293.077 5+ 2.99 m (9'-10") 2.6 x 15.1 x 5.2 m (8'-7" x 49'-7" x 17'-1") 29.5 x 18.1m 30.9 x 19.3m (101'-5" x 63'-4") 164.0 m² (1766 ft²) Upon request Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Gross weight: Spare part guarantee: 21 pc. 15.5 m³ (548 ft³) 4 20 h Upon request

Upon request Upon request Upon request Lifelong






Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178

www.berliner-playequipment.com info@berliner-seilfabrik.com

Combi.077 - Product Specification

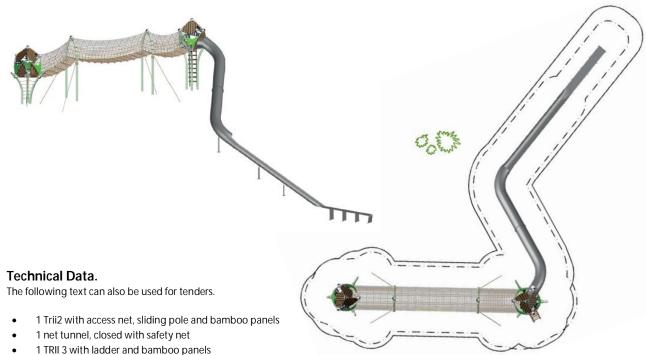

1 long curved tunnel and cancave slide

Tube framework:

A combination of straight and bended stainless steel Frameworx-"tubes, Ø 60.3 m (2 3/8"); the tubes are connected to build an oblated icosahedron space framework

Nodes:

Frameworx-aluminum ball connectors; Ø 250 mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene): Ø 16- 18 mm (5/8" - 11/16")

Bamboo panels:

Bamboo strips 90 mm, (3 1/2'') mounted at a particle board made from HDPE, 19 mm (3/4'') thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework

Steel posts:

Steel pipes Ø 133 mm (5 ¼'') with a rounded cast aluminum post top, minimum wall thickness 7.1mm (1/4''); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process

Cross tubes made of stainless steel Frameworx-®tubes, $\emptyset _ 60,3$ m (2 3/8"), material AISI304 (DIN 1.4301)

Access net:

Rope Ø \square 16 mm (5/8"), mesh size 300 x@mm (11-13/16"x11-13/16"), rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic)

Sliding pole:

Stainless steel pipe, $\emptyset \square 40 \text{ mm} (1 \text{ 1/2''})$; material AISB04 (DIN 1.4301) connected to the main structure at a Frameworx-aluminum ball connector, $\emptyset \square 250 \text{ mm} (9 \text{ 13/16''})$

Ladder:

Ladder flange made out of stainless steel profile 60x20mm (2-3/8"x 3/4"), steps made out of Bamboo strips 90mm, (3 1/2")

Net tunnel:

Rope Ø 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic); safety net comprised of stainless steel net, Ø 4 mm, mesh size 40 x 40 mm



Berliner Seilfabrik Play Equipment Corporation 96 Brookfield Oaks Drive, Suite 140 Greenville, SC 29607

T + 1 864 627 1092 F + 1 864 627 1178

www.berliner-playequipment.com info@berliner-seilfabrik.com

