

# Cosmo.11– Product Specification



Picture shows Cosmo.20

## Cosmo – The first totally round rope play structure

The innovative space structure offers exciting play options never before experienced. Cosmo is a whole new round of fun in play equipment: The first totally round rope play structure has arrived.

Apart from the basic system, Cosmo stands out due to its many freely selectable add-ons and diverse play activities. This gives the Cosmo an advantage over several rounds compared to conventional climbing frames.

In 2008 Cosmo received the prestigious “Red Dot” design award for excellent design quality.

### Cosmo.11 – At a glance.


Product Family:	<b>Cosmo</b>	Number of Foundations:	<b>8 pc.</b>
Item Number:	<b>90.112.110</b>	Concrete Volume C20/C25:	<b>2.5 m<sup>3</sup> (88.3 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>3</b>
Fall Height (DIN EN 1176):	<b>2.30 m (7'-7")</b>	Installation Time without foundation:	<b>10 hours</b>
Length x Width x Height:	<b>9.3 m x 7.2 m x 3.8 m (30'-3" x 23'-8" x 12'-4")</b>	Dimensions of largest part:	<b>0.1 m x 1.3 m x 4.6 m (0'-4" x 4'-3" x 15'-1")</b>
Protective Surfacing Area (DIN EN 1176):	<b>12.8 m x 10.4 m</b>	Weight of heaviest part:	<b>105 kg (231.5 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>12.9 m x 11.1 m (42'-4" x 36'-5")</b>	Shipping Volume:	<b>6.0 m<sup>3</sup> (211.9 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>89.1 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>93.5 m<sup>2</sup> (1,006.5 sf)</b>	Certificate according to DIN EN 1176:	<b>No.: Z2 15 12 10256 245 TÜV Product Specification</b>

  
**Berliner**  
 Berliner Seilfabrik  
 Play Equipment Corporation  
 96 Brookfield Oaks Drive, Suite 140  
 Greenville, SC 29607

T + 1 864 627 1092  
 F + 1 864 627 1178

[www.berliner-playequipment.com](http://www.berliner-playequipment.com)  
[info@berliner-seilfabrik.com](mailto:info@berliner-seilfabrik.com)

# Cosmo.11– Product Specification

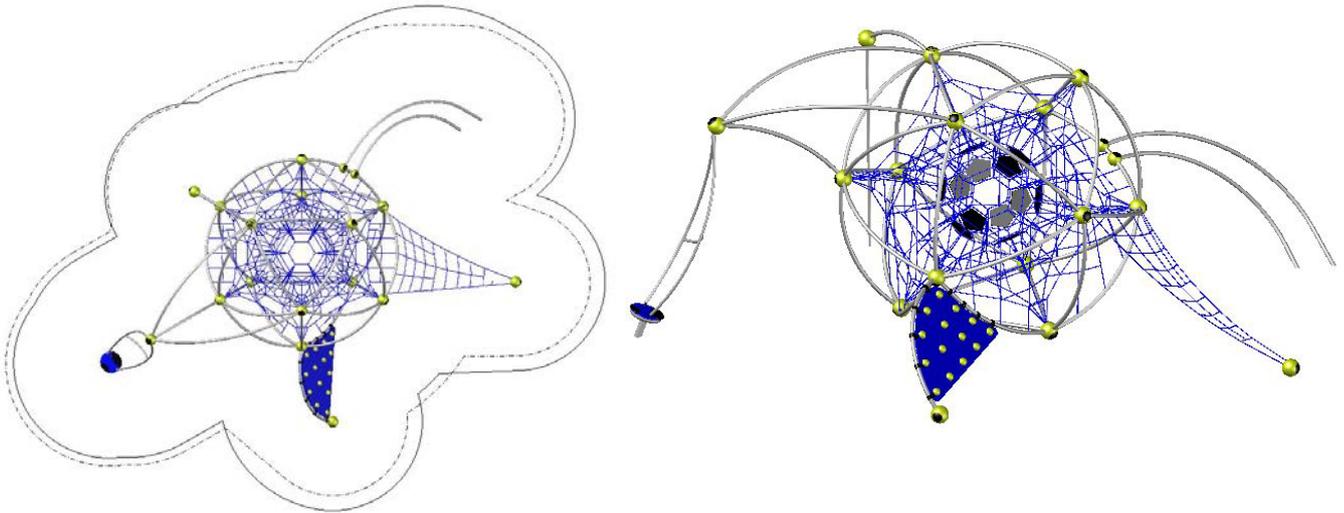

## Technical Data.

The following text can also be used for tenders.

- Cosmo
- Access net
- Climbing ramp
- Sliding pole
- Duck Jibe
- Banister
- Rubber pods

### Tube framework:

Curved stainless steel tubes; Ø 60.3 mm (2 3/8")

### Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); Ø 16 mm (5/8")

### Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

### Climbing ramp:

Mold-shaped HDPE-panel, 19 mm (3/4") thickness, rounded edged; equipped with 14 powdercoated steel-hemispheres, and angle mounted with 9 aluminum plate clamps on stainless steel tubes, Ø 60.3 mm (2 3/8"), wall thickness 2.9 mm; grounded with Framework-aluminum ball connector, Ø 250 mm (9-13/16") and foundation-tube Ø 60,3 mm (2 3/8")

### Sliding pole:

Curved stainless steel pipe: Ø 60.3 mm (2-3/8"), wall thickness 2.9 mm; Framework-aluminum ball connectors, Ø 250 mm (9-13/16"); stainless steel sliding pole Ø 40 mm (1-3/5") wall thickness 5 mm (3/16")



  
**Berliner**

Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

www.berliner-playequipment.com  
info@berliner-seilfabrik.com

## Cosmo.11– Product Specification



### Technical Data.

#### Duck Jibe:

Curved Frameworkx stainless steel pipes  $\varnothing$  60.3 mm (2 3/8"), wall thickness 2.9 mm; lubricated, antifriction reciprocal bearings; connected to the main Cosmo framework with a thick-walled Frameworkx-aluminum ball connector,  $\varnothing$  250mm (9-13/16"), standing platform is comprised of grained HDPE, 19 mm thick; the turning bearing construction located in the ground consists of Frameworkx stainless steel pipe retainers,  $\varnothing$  40 mm (1-3/5"), wall thickness 5 mm (3/16")

#### Curved banister:

Curved stainless steel pipes;  $\varnothing$  60.3 mm (2 3/8") wall thickness 2.9 mm; connected to the main structure with 2 aluminum ball connectors  $\varnothing$  200mm (7-9/10")

#### Rubber pods:

12 pentagon replaceable rubber pods comprised of durable, vandal-resistant conveyor belt material in the center of spacial netting; approx. 10 mm thick; attached to the ropes with 5 aluminum clamps



**Berliner**

Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

[www.berliner-playequipment.com](http://www.berliner-playequipment.com)  
[info@berliner-seilfabrik.com](mailto:info@berliner-seilfabrik.com)