

SpooRoo Combi.02 – Product Specification



Spooky Rookies – Haunted Playhouses for Toddlers

Spooky Rookies promote physical development. During climbing, sliding and romping in the many different playhouses, toddlers are able to test their skills.

It is possible to combine the playhouses' shape, size and colours. A stepladder, ramp or slide offer further constructive options. The diversity of Spooky Rookies are also enjoyed by four ghosts. They represent a colour concept in each case and live in the playhouses. Do not be afraid, the ghosts are pleased about every guest.

SpooRoo Combi.02 – At a glance.

Product Family:	Spooky Rookies	Number of Foundations:	9 pc.
Item Number:	90.296.002	Concrete Volume C20/C25:	0.9 m³ (31.8 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	0.45 m (1'-6")	Installation Time without foundation:	6 hours
Length x Width x Height:	1.8 m x 3.3 m x 2.2 m (5'-11" x 10'-10" x 7'-3")	Dimensions of largest part:	1.2 m x 1.2 m (3'-12" x 3'-12")
Protective Surfacing Area(DIN EN 1176):	4.8 m x 6.4 m	Weight of heaviest part:	45 kg (99.21 lbs)
Protective Surfacing Area (ASTM 1487):	5.6 m x 7.1 m (18'-5" x 23'-4")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	25.05 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	31.81 m² (342.4 ft²)	Certificate according to DIN EN 1176:	No.: Z2 17 01 10256 240 TÜV Product Service



Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607


T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com



SpooRoo Combi.02 – Product Specification

scale 1:100

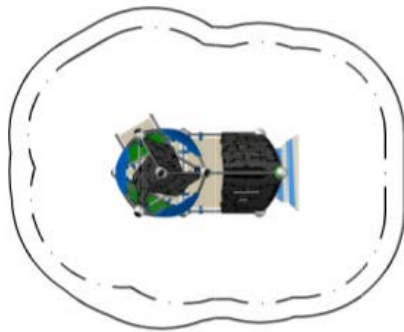

Technical Data.

The following text can also be used for tenders.

- 1 haunted house Spoo S with window
- 1 stepladder
- 1 haunted house Roo S
- 1 ramp

Members:

Steel pipes \varnothing 101.6 mm (0'-4"); wall thickness 4 mm (0'-1") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Cross tubes - stainless steel Frameworkx-®tubes, \varnothing 48 mm (0'-2")

Nodes:

Frameworkx-®aluminum ball connectors, \varnothing 200 mm (0'-8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps

Panels/Ramp:

HDPE-panel (roof and walls), thickness 19 mm (3/4"), panel connected to steel pipes (for more details, see members) with cast aluminum panel clamps; non-skid HPL-panel (bottom and ramp), thickness 19 mm (3/4")

Connections:

Number of mechanical components as less as possible; all bolts and nuts exposing permanently to the weather consist of stainless steel

Stepladder:

Non-skid HPL-tiles (steps), thickness 19 mm (3/4"); curved stainless steel handrails



Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com

