


Tower2 – Product Specification

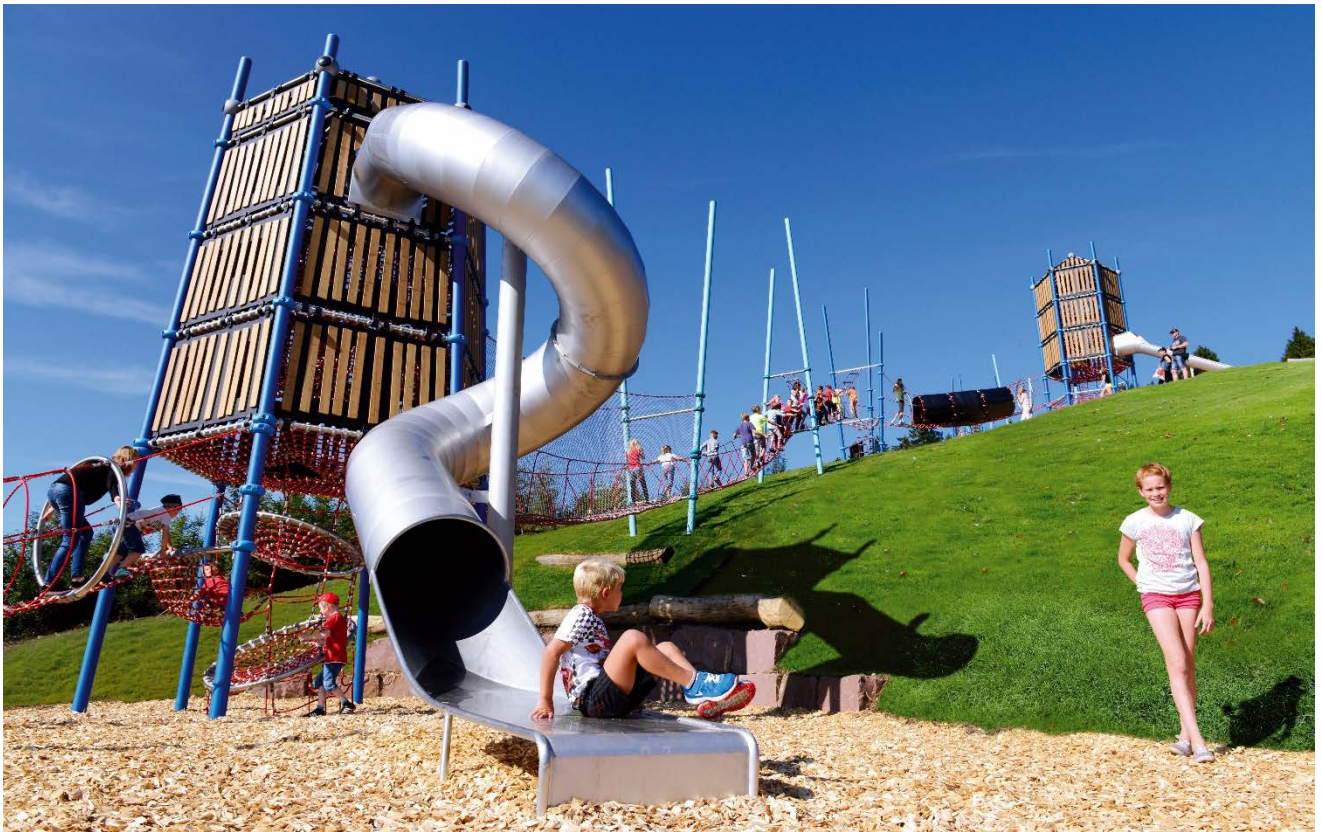


Tower2

A castle turret? A secret rocket launch pad? A child's imagination can be boundless. The mighty tower erected on inclined posts can only be breached via a combination of plate-shaped nets and net matting. The five meter long tunnel slide promises to be a highlight of every playground visit.

Tower2 – at a glance.

Product Family:	Greenville	Number of Foundations:	3 Stück
Item Number:	90.295.002	Concrete Volume C20/C25:	13 m³ (460 ft³)
Children's Age:	5+	Number of skilled installers required:	4
Fall Height (DIN EN 1176):	2.94m (9'-8")-	Installation Time without foundation:	16 Stunden
Length x Width x Height:	5.7 m x 8.4 m x 8.7 m (18'-9" x 27'-7" x 28'-7")	Dimensions of largest part:	7.6 m x Ø 0.2 m (25'-0" x Ø 8")

The protective Surfacing Area and Fall Height of our Towers & Triis depend on the chosen combination and execution and be like calculated on request you.

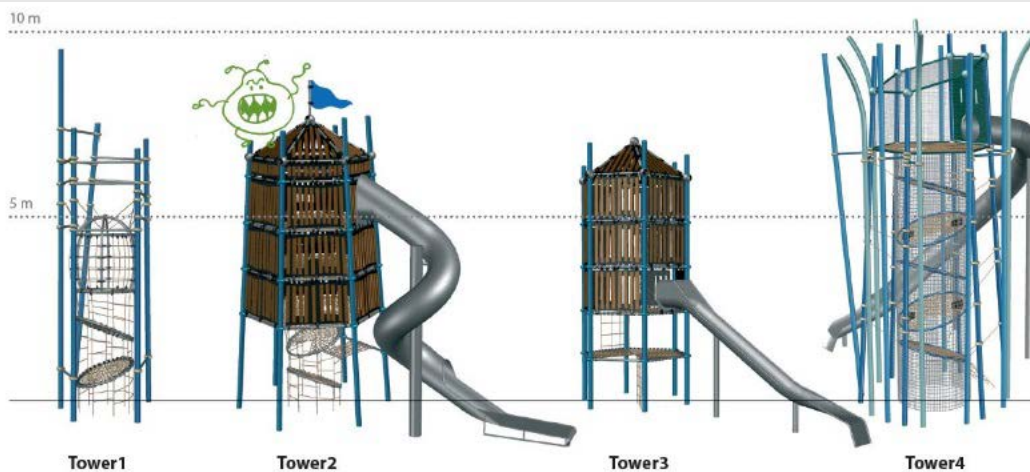


Berliner

Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com



Tower2 – Product Specification



Technical Data.

The following text can also be used for tenders.

Posts:

Steel posts Ø 133 mm (5 1/4"); wall thickness 5 - 11 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Tube framework:

Stainless steel tubes; Ø 60.3 mm (2 3/8"); connected to the posts with Terranos two-part cast aluminum connecting clamps ;

Nettings:

Stainless steel tubes; Ø 60.3 mm (2 3/8"), bent into rings, filled with closed meshed netting. Ring of the intermediate level with opening

Nodes:

Framework®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Planar netting:

Rope Ø 16 mm (5/8"); closed meshed; rope crossing points localized by durable, drop forged aluminum ballknots (no plastic). Openings with offset to the next net

Bamboo panels:

Bamboo strips 90 mm, (3 1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework

Concave curved tunnel slide:

Slide made of stainless steel, the cheeks are welded with stainless steel handrails, afterwards smoothed and polished; connected with aluminum-slide clamps



Berliner

Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com

