Terrano.2059 - Product Specification



Terranos net landscapes - straight posts and connecting elements

Our netscapes offer children of all ages plenty of space for any kind of climbing, crawling, balancing and other physical activities. The highly accessible components are also the ideal place to get engaged in imaginative play or just hang around and relax.

The range of rope accessories can turn any space into a netscape. Whether straight or sloping, there is always space for a two-dimensional or a hand-over-hand climbing component. And if a tree should be in the way, we simply integrate it and make it the focal point of your playground.

Terrano.2059 – at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Terranos & Terranova 95.172.059 5+ 2.50 m (8'-2") 7.7 m x 21.1 m x 3.5 m (25'-4" x 69'-3" x 11'-6") 10.7 m x 24.6 m 11.4 m x 25.4 m (37'-4" x 83'-3")

160.0 m² 178.6 m² (1,922.4 sf) Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: Certificate according to DIN EN 1176: 15 pc. 8.2 m³ (289.6 ft³) 3 16 hours 4.8 m x 0.8 m x 0.6 (15′-9″ x 2′-8″ x 1′-11″)


100 kg Upon request Lifelong No.: Z2.16.01.10256.255 TÜV Product Service



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com
Revision: April 2016
Page 1

Terrano.2059 - Product Specification

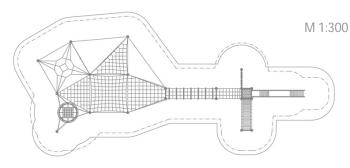

Technical Data.

The following text can also be used for tenders.

- Wasps nest
- Space cell
- Hand-over-hand-loop-rope
- Harp net
- Climbing rope
- 2 Balancing cable
- 4 plannar nets and a transition net
- Suspension bridge
- Platform
- Rubber access ramp
- Straight box slide
- Climbing wall




U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

Posts

Steel pipes Ø 133 mm (5 $\frac{1}{2}$); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Terranos clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/epoxy-/polyester-process



Wasps nest:

Circumferential cables are round strand ropes with spring steel core, Ø 16 mm (5/8"); ball-shaped net connected to steel ring Ø 1530 mm (5'- '4") and pipe diameter 48.3 mm (1' 7/8") with cast aluminum rope clamps; steel ring suspended from cables to three steel posts

Space cell

Twelvefold suspended 3d-net cell; all suspension cables connected to steel posts with cast aluminum Terranos clamps; rope Ø 16 mm (5/8")

Hand-over-hand-loop-rope:

All ropes Ø 20 mm; length per loop approx. 110 mm clear diameter; loops durable fixed to a horizontal rope with aluminum ferrules



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33

Terrano.2059 - Product Specification





Technical Data.

Harp net:

Two bended edge ropes with five vertical connection cables; all ropes \emptyset 16 mm (5/8"); connected at four points to steel posts with cast aluminum Terranos clamps

Climbing rope:

All ropes Ø 20 mm; vertical ropes with durable ebonite cylinders; distance between cylinders approx. 300 mm (11-13/16"); ebonite cylinders are fixed to the rope with aluminum ferrules; suspended from horizontal rope connected to steel posts

Balancing rope:

Ropes Ø 16 mm (5/8"); height of handrail approx. 900 mm (2- 7 %); consists of 1 balancing cable and 1 handrail; rope ends are fixed with cast aluminum Terranos clamps to steel posts

Planar nets

Rope Ø 16 mm (5/8"): mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

Suspension bridge:

Rope Ø 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5" x 9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic); with in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps

Platform tower:

HPL-platform; thickness 19 mm (3/4"); connected to steel pipes with cast aluminum panel clamps

Slide:

Straight box slide made of stainless steel; the cheeks are welded with stainless steel handrails; afterwards smoothed and polished

Rubber access ramp:

Rubber comprised of durable, vandal-resistant conveyor belt material; rope Ø 16 mm (5/8")

Climbing wall:

HDPE-wall; thickness 19 mm (3/4"); connected to steel pipes and posts with cast aluminum panel clamps and Terranos clamps; climbing handles: rosin with quartz sand



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33



info@berliner-seilfabrik.com www.berliner-seilfabrik.com

Revision: April 2016