

# Tetragode 5352 – Product Specification



## Tetragode – Center post structure of the product group Pergode

It takes two to tango! — The double Tetragode 5350 is a medium mountain range with two peaks beyond 5 meters. There is plenty of space leaving no kid behind on the ground.

### Tetragode 5352 –At a glance.

Product Family:	<b>Pergode</b>	Concrete Volume C20/25:	<b>8,2 m<sup>3</sup></b>
Item Number:	<b>71.200.053.52</b>	Number of skilled installers required:	<b>4</b>
Children's Age:	<b>5+</b>	Installation Time without foundation:	<b>8 h</b>
Fall Height (DIN EN 1176):	<b>1,7 m</b>	Dimensions of largest part:	<b>Ø 0,127 m x 5,75 m</b>
Length x Width x Height:	<b>11,52 x 18,02 x 5,35m</b>	Weight of heaviest part:	<b>300 kg</b>
Protective Surfacing Area (DIN EN 1176):	<b>21,1m x 14,6m</b>	Shipping Volume:	<b>6,1 m<sup>3</sup></b>
Minimum space required DIN EN 1176:	<b>160,9 m<sup>2</sup></b>	Spare part guarantee:	<b>lifelong</b>
Number of Foundations:	<b>8</b>	Certificate according to DIN EN 1176:	<b>Z1A 14 03 10256 202 TÜV Product Service</b>



  
**Berliner**  
 Berliner Seilfabrik GmbH & Co.  
 Lengeder Straße 2/4  
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
 www.berliner-seilfabrik.com



# Tetragode 5352 – Product Specification

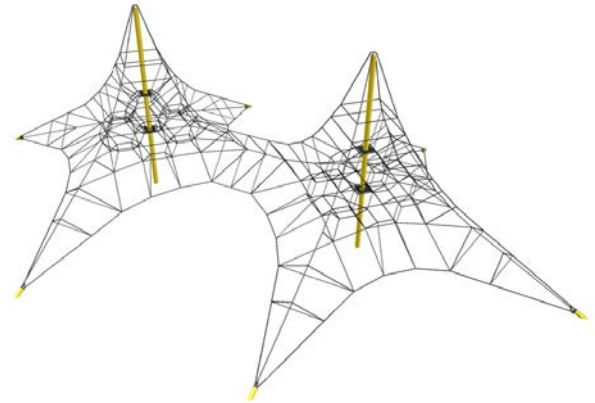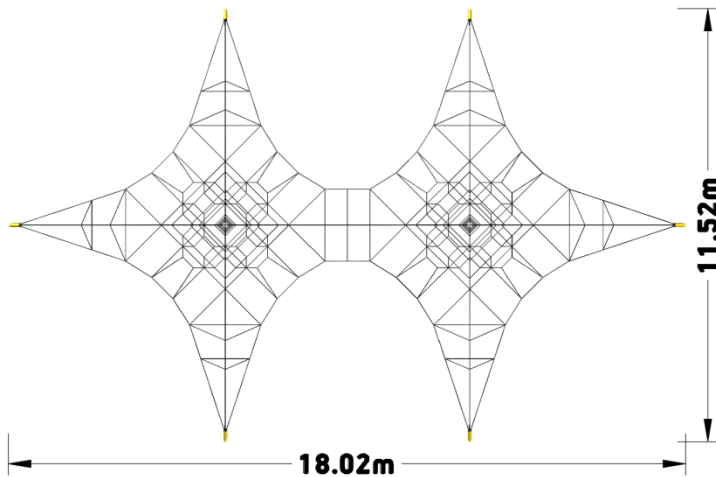

## Technical Data.

The following text can also be used for tender.

- Tetragode 5350
- Tetragode 5350

### Central mast climbing structure:

A fourfold suspended climbing net with border cables (rope diameter  $\varnothing$  18 mm) including a spatial net (rope diameter  $\varnothing$  20 mm) and a central steel mast. The four bracing devices with encapsulated clamping system are mounted on the surface of the outer foundations

### Central Mast:

Galvanized steel post  $\varnothing$  127 mm

### Outer clamping points:

Steel post  $\varnothing$  101.6 mm on steel plates 787 x 300 x 12 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Center supporting point

Steel post  $\varnothing$  88.9 mm on steel base plate 500 x 500 x 12 mm, anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

### Spacial Netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands

  
**Berliner**  
Berliner Seilfabrik GmbH & Co.  
Lengeder Straße 2/4  
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
www.berliner-seilfabrik.com

