

Tetragode 6102 – Product Specification



Tetragode – Center post structure of the product group Pergode

Tetragode space nets are thrilling great! — A double-combination of Tetragode 6100 is making a rock-solid high mountain range. Become an eye witness of youngsters breaking through the 6m-barrier!

Tetragode 6102 –At a glance.

Product Family:	Pergode	Concrete Volume C20/25:	8,2 m³
Item Number:	71.200.061.02	Number of skilled installers required:	4
Children's Age:	3+	Installation Time without foundation:	8 h
Fall Height (DIN EN 1176):	2 m	Dimensions of largest part:	Ø 0,127 x 6,5 m
Length x Width x Height:	12,93m x 20,13m x 6,1m	Weight of heaviest part:	400 kg
Protective Surfacing Area (DIN EN 1176):	23,2 m x 16 m	Shipping Volume:	7 m³
Minimum space required DIN EN 1176:	186,1 m²	Spare part guarantee:	lifelong
Number of Foundations:	8	Certificate according to DIN EN 1176:	Z1A 14 03 10256 202 TÜV Product Service

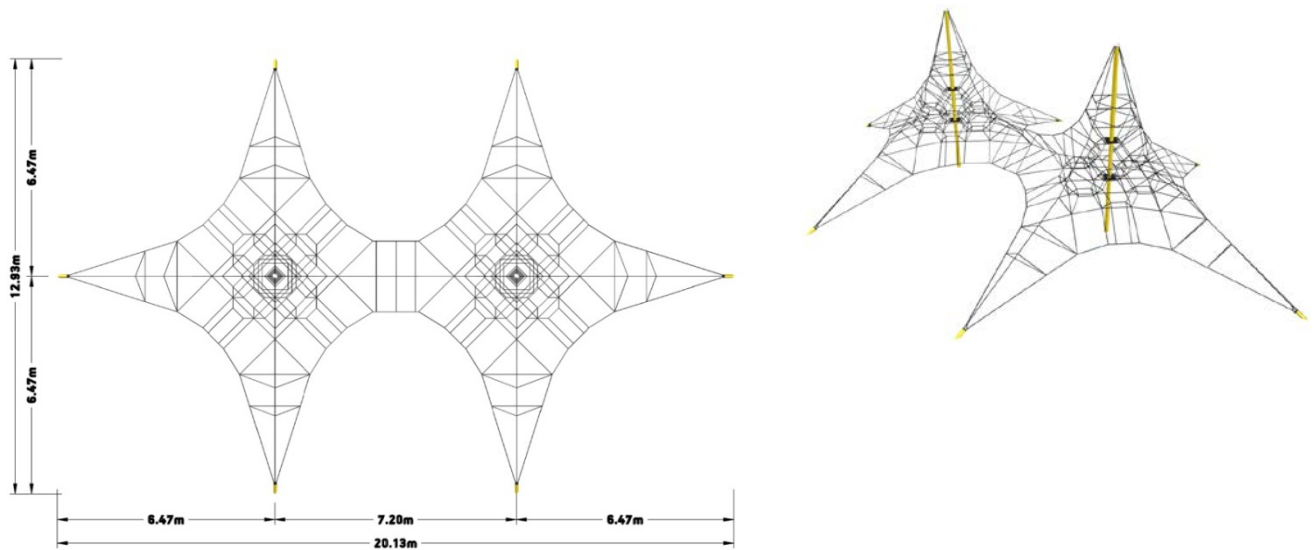

Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com



Tetragode 6102 – Product Specification



Technical Data.

The following text can also be used for tender.

- Tetragode 6100
- Tetragode 6100

Central mast climbing structure:

A fourfold suspended climbing net with border cables (rope diameter \varnothing 18 mm) including a spatial net (rope diameter \varnothing 20 mm) and a central steel mast. The four bracing devices with encapsulated clamping system are mounted on the surface of the outer foundations

Central Mast:

Galvanized steel post \varnothing 127 mm

Outer clamping points:

Steel post \varnothing 101.6 mm on steel plates 787 x 300 x 12 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Center supporting point

Steel post \varnothing 88.9 mm on steel base plate 500 x 500 x 12 mm, anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope[®]-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Spacial Netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands

