

Univers

Quadrifol Base Product Specifications



















Published: November 2019



Quadrifol Base

Univers showcases all see-through outer frame structures with three-dimensional nets inside. All tensioning points are provided with the patented AstemTT tensioning system. This ensures that no technical connecting elements or rope loops are located in the play area.

The Quadrifol Base is a climbing web stretched across metal arcs. It offers endless climbing fun in 3-D for children of all ages!

71.133.000

	Product Family	Univers
	Length x Width x Height (m) Length x Width x Height ("')	4,4 x 4,4 x 3,5 14-5 x 14-5 x 11-4
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("')	7,4 x 7,4 8,1 x 8,1 26-5 x 26-5
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("')	1,3 6-0
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	48.13 618.4
	Number of Foundations	4
	Concrete Volume C20/C25 (ft ³)	191
	Number of skilled Installers required	3
	Installation Time without Foundation	6 hours
	Dimensions of largest Part ("')	2-0 x 11-10 x 0-8
	Weight of heaviest Part (lbs)	220.5
	Shipping Volume (ft ³)	148.4
	Total Weight (lbs)	1,329.4
	Spare Part Guarantee	Lifelong
	Certified acc. to EN 1176	Z2 010256 0282

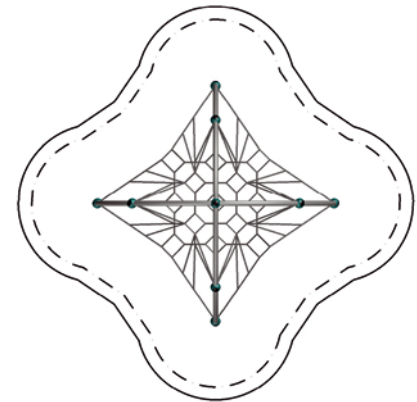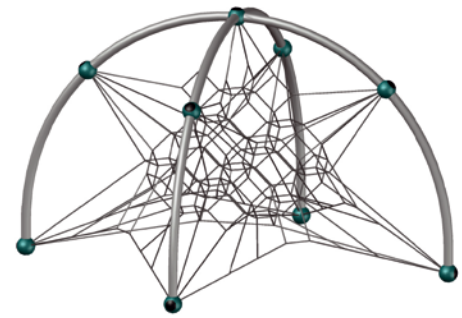

Technical Data

The following text can also be used for tenders.

Bent tubes:

Galvanized steel post Ø 5 ¼", on demand with color finish including solvent-free epoxy-/polyester-process powder coating.

Balls:

Frameworkor®-aluminum ball connectors, Ø 9 13/16"; anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating; incorporating the patented Astem TT® tensioning system, securely closed with durable ebonite caps.

Ropes:

U-Rope®-round strand ropes with galvanized steel cores, Ø 1 1/16"; external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene).

Spatial net:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings, aluminum-alloy ball-knots, T-connectors and barrel-ferrule (no plastic connections) in situ-replaceable rope strands.