


Spaceball L

Univers

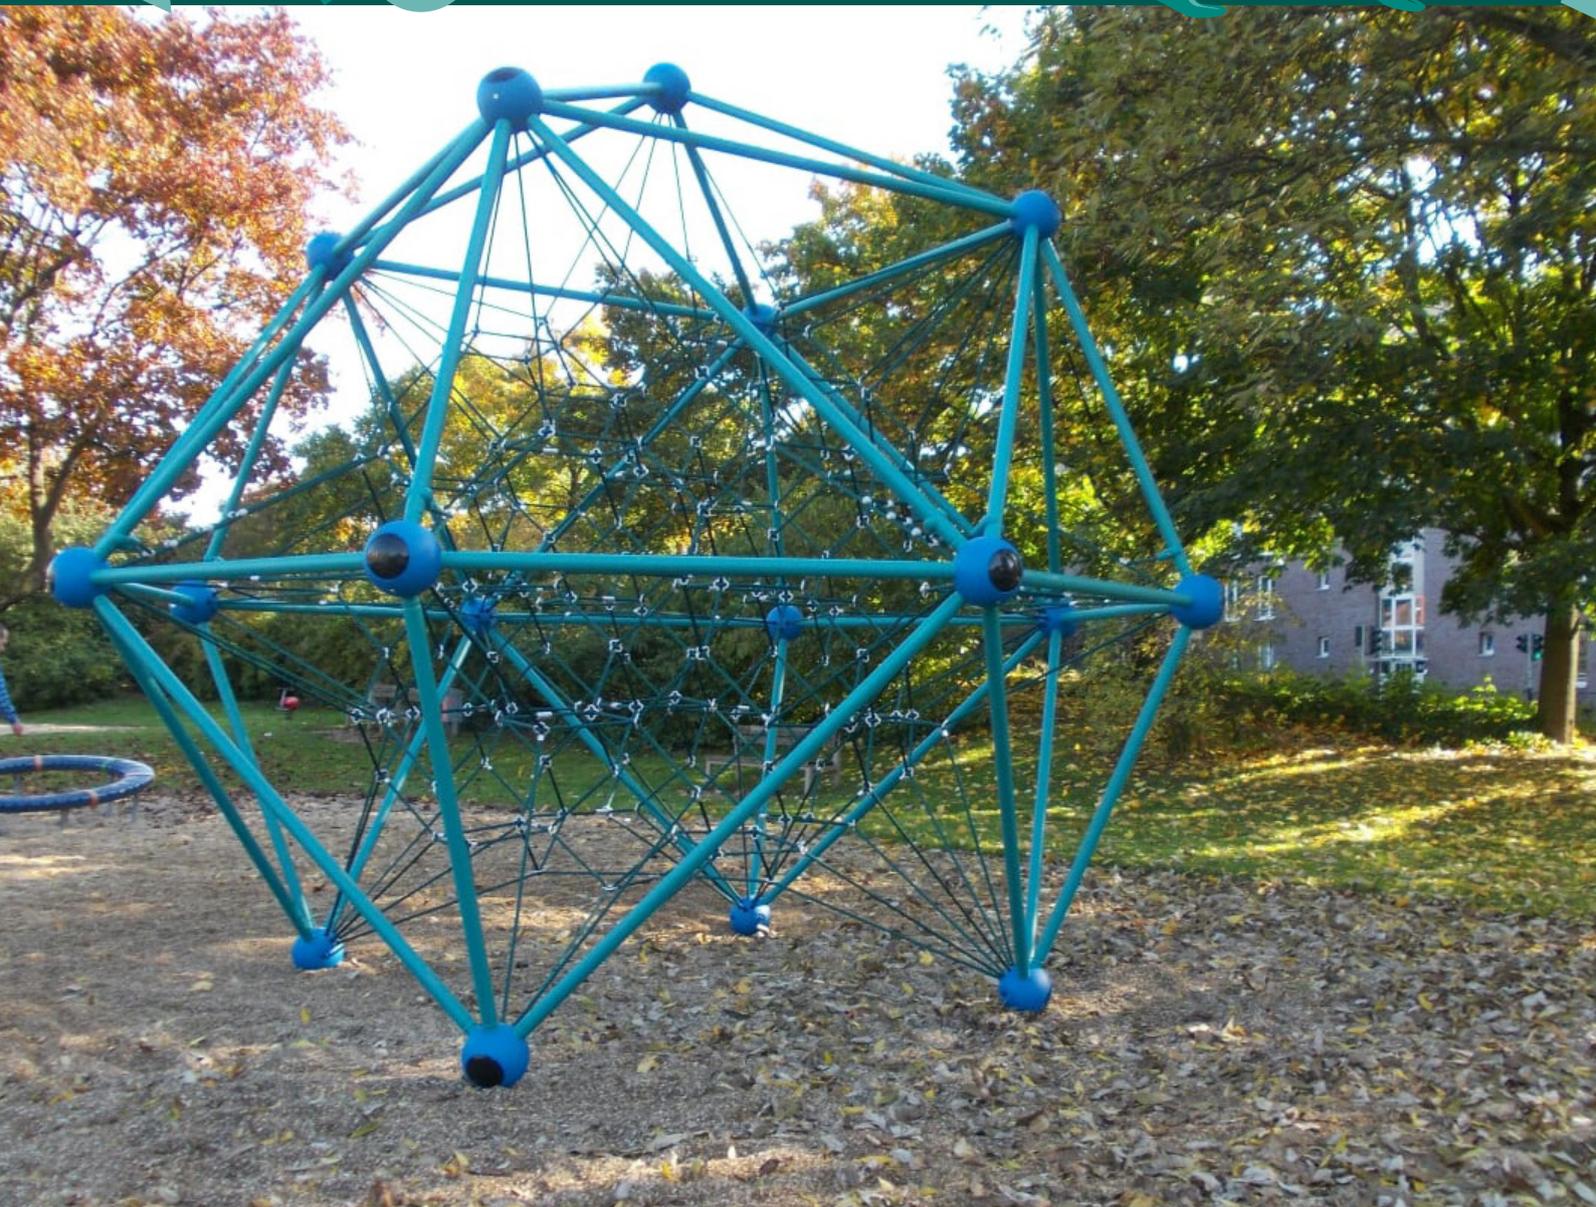

Published: May 2023



Spaceball L

Product Specification

Plenty of space for climbers of all age groups is offered by the Spaceball L. Though it aims high the free fall height is only 1,94 m (6'-5").

90.100.111

	Product Family	Univers
	Length x Width x Height (m) Length x Width x Height ("")	5,4 x 5,4 x 4,7 17-8 x 17-8 x 15-2
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	9,0 x 9,0 9,1 x 9,1 29-8 x 29-8
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,94 6-5
	Age	5
	Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	60,1 658,4
	Number of Foundations	4
	Concrete Volume C20/C25 (m ³) Concrete Volume C20/C25 (ft ³)	1,5 53,0
	Number of skilled Installers required	2
	Installation Time without Foundation	6 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	2,3 x 0,1 x 0,1 7-7 x 0-4 x 0-4
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	150 330
	Shipping Volume (m ³) Shipping Volume (ft ³)	3,4 120
	Total Weight (kg) Total Weight (lbs)	700 1550
	Spare Part Guarantee	Lifelong

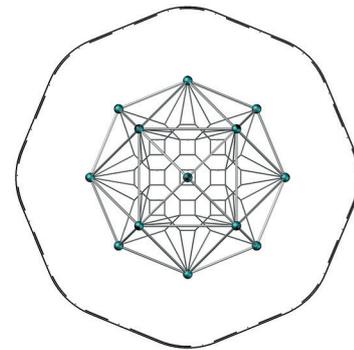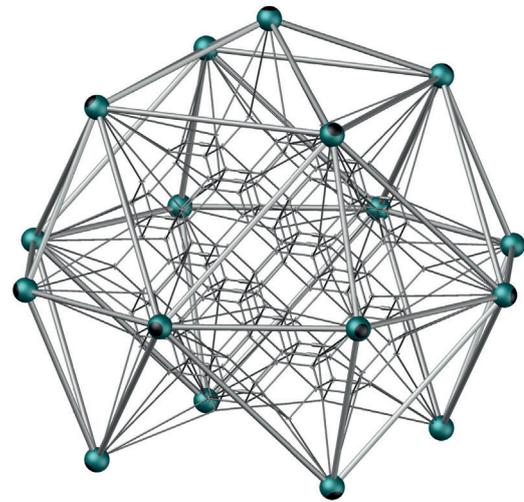

1:200

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Tube Framework:

Framework®- steel tubes, Ø 60.3 mm (2 3/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Spheres:

Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The tensioning ball incorporates an AstemTT® net tensioning system. Securely closed with durable EPDM-caps.

Spatial Net:

Rope crossing points are localized with durable, drop forged aluminum cloverleaf rings and drop forged aluminum ballknots / aluminum-ferrules (no plastic connections). In situ-replaceable rope strands (no special tools required).

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").