

Wasp's Nest

HodgePodge


















Published: January 2024



Wasp's Nest.120 Product Specification

Inside that big netball, formed by a special spring-core cable, kids are risen above all the action. It is great place to observe the play-scape or to having a chat or just to let the mind wander. Available with or without balls on the post.

Wasp's Nest.120

95.200.120

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("-")	3,3 × 2,9 × 3,8 10-8 × 9-5 × 12-3
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("-")	6,3 × 6,3 6,9 × 6,5 22-7 × 21-3
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("-")	2,44 8-1
	Age	5 - 12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	29,4 346,0
	Number of Foundations	3
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	2,1 74,2
	Number of skilled Installers required	2
	Installation Time without Foundation	3 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("-")	4.7 × 0.2 × 0.2 6-0 × 15-6
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	142 314
	Shipping Volume (m³) Shipping Volume (ft³)	6 196
	Total Weight (kg) Total Weight (lbs)	830 1830
	Spare Part Guarantee	Lifelong

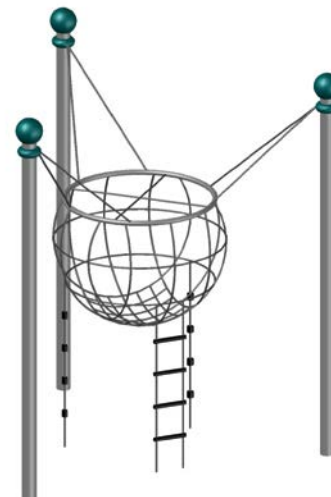

1:200

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Rope Ladder:

Rope Ø 16 mm (5/8"), black polyamide rungs: Ø 40 mm (1 1/2"), 350 mm length (1'-2").

Wasp's Nest:

Ball-shaped net connected to steel ring Ø 1530 mm (5'- 1/4") and pipe diameter 48.3 mm (1' 7/8") with cast aluminum rope clamps. Steel ring suspended from Ropes to three steel posts. Rope diameter Ø 16 mm (5/8").

Climbing Rope:

Rope Ø 18 mm (11/16") with durable ebonite cylinders. Distance between cylinders approx. 300 mm (11 13/16"). The ebonite cylinders are fixed to the rope with aluminum ferrules.

Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Spheres:

Frameworkx®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.