

Urban Design

Fireball.2.2 Product Specification



Published: June 20201
















Fireball.2.2



Urban Design Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All URBAN DESIGN Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated recycled aluminum0 connectors, high density polyethylene (HDPE)

panels and ITR-bearings for maximum safety and durability.

The Fireball is the best place in town for those who love to get dizzy occasionally. The rotation axis is inclined at 2°. Move your body to and around the axis and you will feel what gravity is. The Fireball is absolutely strong enough for two or more users to take a spin.

90.260.307

	Product Family	Urban Design
	Length x Width x Height (m) Length x Width x Height ("")	0,98 x 0,98 x 1,38 3-3 x 3-3 x 4-7
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	5,0 x 5,0 4,7 x 4,7 15-3 x 15-3
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	0,31 1-0
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	19.5 210
	Number of Foundations	1
	Concrete Volume C20/C25 (ft ³)	17.7
	Number of skilled Installers required	2
	Installation Time without Foundation	2 hours
	Dimensions of largest Part ("")	3-3 x 3-3 x 5-3
	Weight of heaviest Part (lbs)	243
	Shipping Volume (ft ³)	38.9
	Total Weight (lbs)	276
	Spare Part Guarantee	Lifelong

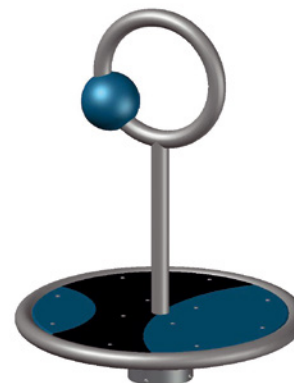

Technical Data

Technical changes are reserved. The following text can also be used for tenders.

Turntable:

The stainless steel plate with a diameter of Ø 3'-2" is covered with HDPE plates and surrounded by a welded stainless steel tube with a diameter of Ø 2 ¾".

Tubes and Balls:

The bent stainless steel tubes with a diameter of Ø 2 ¾" are connected to a Frameworkx® aluminum ball with a diameter of Ø 7 7/8", that is sandblasted, powder-coated without solvents and securely closed with a durable EPDM cap.

Stand:

The fully integrated bearing unit forms a self-contained system and is therefore particularly insensitive to weather influences and requires little maintenance.

Covering:

The non-skid HDPE plates with a thickness of ¾" are screwed flat on the turntable.