

Greenville Combi.102

Greenville


















Published: March 2024

Greenville Combi.102 Product Specification

This Greenville combination of two Trii1 will make the hearts of the little ones beat faster. The tree houses are equipped with various add-on elements such as a box slide, access net and ladder and are connected by a suspension bridge.

90.293.102

	Product Family	Greenville
	Length x Width x Height (m) Length x Width x Height ("")	6,9 x 5,9 x 3,2 22-5 x 19-2 x 10-3
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	10,4 x 8,3 10,5 x 8,9 34-6 x 29-2
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,10 3-8
	Age	3
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	49,3 638,6
	Number of Foundations	6
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	3,1 108,4
	Number of skilled Installers required	3
	Installation Time without Foundation	10 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	3,3 x 0,5 x 0,7 10-10 x 1-8 x 2-4
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	75 165,3
	Shipping Volume (m³) Shipping Volume (ft³)	3,2 112
	Total Weight (kg) Total Weight (lbs)	1730 3814
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Tube Framework:

A combination of straight and bended stainless steel Framework®- tubes Ø 60,3 mm (2 3/8"), material AISI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint.

Spheres:

Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

Bamboo Panels:

Bamboo strips 90 mm (3 1/2") width, mounted on a supporting board made from HDPE, 19 mm (3/4") thickness, rounded edges. Mounted with cast aluminum clamps to the tubes of the framework.

Access Net:

Rope Ø 16 mm (5/8"), mesh size 300 x 300mm (11 13/16" x 11 13/16"), rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic).

Ladder:



Ladder flange made out of stainless steel profile 60 x 20mm (2-3/8" x 3/4"), steps made out of bamboo strips 90 mm (3 1/2").

Suspension Bridge:

Rope Ø 16 mm (5/8"), mesh size minimum 250 x 250 mm (9 4/5" x 9 4/5"). Rope crossing points localized by durable, drop forged aluminum ballknots (no plastic). With in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps.

Straight Box Slide:

Straight box slide made of stainless steel. The cheeks are welded with stainless steel handrails.

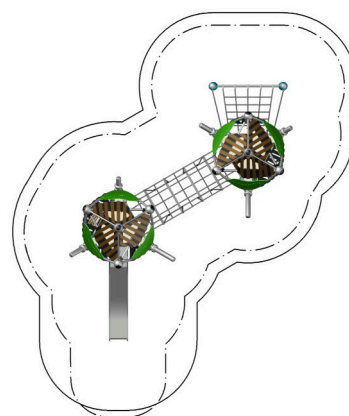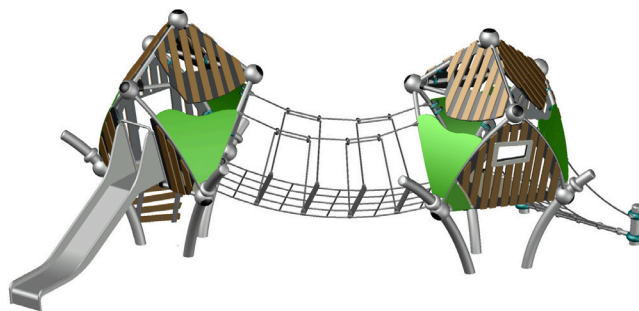

1:200