

Boo- Product Specification



Boo

Small Greenville Rope-play house Boo with an elevenfold suspended spatial net (rope diameter Ø18mm) and bamboo panels. Equipped with the AstemTT net tensioning system.

Boo – at a glance.

| | | | |
|--|--|--|---|
| Product Family: | Greenville | Number of Foundations: | - |
| Item Number: | 90.280.000 | Concrete Volume C20/C25: | - |
| Children's Age: | 3+ | Number of skilled installers required: | 3 |
| Fall Height (DIN EN 1176): | 1.53 m (5'-1") | Installation Time without foundation: | 8 hours |
| Length x Width x Height: | 3.07 m x 2.93 m x 2.53 m (10'-1" x 9'-8" x 8'-4") | Dimensions of largest part: | 1.4 m x 1.4 m x 0.04 m (4'-8" x 4'-8" x 0'-2") |
| Protective Surfacing Area (DIN EN 1176): | 6.09 m x 5.98 m | Weight of heaviest part: | 40 kg (88.2 lbs) |
| Protective Surfacing Area (ASTM 1487): | 6.73 m x 6.59 m (22'-1" x 21'-8") | Shipping Volume: | 3.0 m³ |
| Minimum space required DIN EN 1176: | 28.48 m² | Spare part guarantee: | Lifelong |
| Minimum space required ASTM 1487: | 34.77 m² (375 sf) | Gross weight: | 750 kg (1654 lbs) |
| | | Certificate according to DIN EN 1176: | No.: Z1A 13 06 10256 094 TÜV Product Service |




Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com



Boo- Product Specification

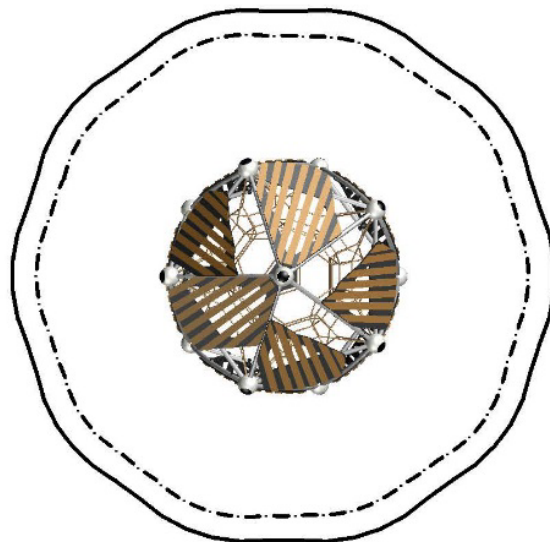

Technical Data.

The following text can also be used for tenders.

Tube framework:

A combination of straight and bended stainless steel Framework-®tubes, \varnothing 60,3 m (2 3/8"), material AISI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint.

Nodes:

Framework-aluminum ball connectors; \varnothing 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires, external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene). Rope-diameter \varnothing 18mm (11/16").

Special netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings, joint-ferrule, connecting-clamps and barrel-ferrule (no plastic connections); in situ-replaceable rope strands.

Bamboo panels:

Bamboo strips 90 mm, (3'-1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework



Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com

Revision: March 2016



Page 2