


# Cherry.140 – Product Specification



**Cherry.140**  
The Cherry.140, with a climbing height of 1.40 m is more of a challenge and therefore teaches older kids good body control.

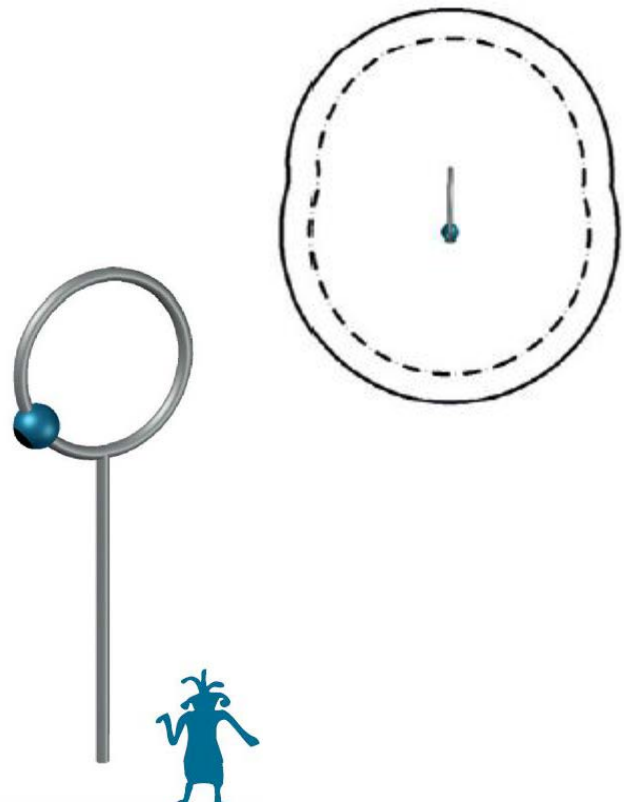

## Cherry.140 – at a glance.

|  |  |  |   |
|--|--|--|---|
| Product Family:                          | <b>Playpoints</b>  | Number of Foundations:                 | <b>1 pc.</b>  |
| Item Number:                             | <b>90.160.202</b>  | Concrete Volume C20/C25:               | <b>0.22 m<sup>3</sup> (7.8 ft<sup>3</sup>)</b>            |
| Children's Age:                          | <b>3+</b>  | Number of skilled installers required: | <b>2</b>  |
| Fall Height (DIN EN 1176):               | <b>1.4 m (4'-8")</b>                                     | Installation Time without foundation:  | <b>2 hours</b>  |
| Length x Width x Height:                 | <b>1.0 m x 0.2 m x 2.3 m<br/>(3'-4" x 0'-8" x 7'-7")</b> | Dimensions of largest part:            | <b>1.0 m x 0.2 m x 2.7 m<br/>(3'-4" x 0'-8" x 8'-11")</b> |
| Protective Surfacing Area (DIN EN 1176): | <b>3.2 m x 3.9 m</b>                                     | Weight of the heaviest part:           | <b>40 kg (89 lbs)</b>                                     |
| Protective Surfacing Area (ASTM 1487):   | <b>3.9 m x 4.6 m<br/>(12'-10" x 15'-2")</b>              | Shipping Volume:                       | <b>1.4 m<sup>3</sup> (50 ft<sup>3</sup>)</b>              |
| Minimum space required DIN EN 1176:      | <b>10.0 m<sup>2</sup></b>                                | Shipping Weight:                       | <b>45 kg (100 lbs)</b>                                    |
| Minimum space required ASTM 1487:        | <b>14.1 m<sup>2</sup> (152 ft<sup>2</sup>)</b>           | Spare part guarantee:                  | <b>Lifelong</b>   |
|  |  | Certificate according to DIN EN 1176:  | <b>No.: Z2 15 06 10256 232<br/>TÜV Product Service</b>    |

## Technical Data.

The following text can also be used for tenders.

### Tubes:

Stainless steel tubes, Ø 60.3 mm (2 3/8") connected to a Frameworx®-aluminum ball connector; Ø 250 mm (9-13/16")

### Nodes:

Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps



Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

www.berliner-playequipment.com  
info@berliner-seilfabrik.com



Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

[www.berliner-playequipment.com](http://www.berliner-playequipment.com)  
[info@berliner-seilfabrik.com](mailto:info@berliner-seilfabrik.com)