

Trii2.08– Product Specification



Trii2.08

With an Trii2 it goes up to a platform in 2 meter height. With Trii2.08 the way up is fiddly, the way down is in opposite much faster with the sliding pole or the slide.

TRII2.08 – at a glance.

Product Family:	Greenville	Number of Foundations:	7 pc.
Item Number:	90.292.200.8	Concrete Volume C20/C25:	2.65 m³ (93.6 ft³)
Children's Age:	5+	Number of skilled installers required:	3
Fall Height (DIN EN 1176):	1.99m (6'-7")	Installation Time without foundation:	8 hours
Length x Width x Height:	4.2 m x 8.3 m x 4.2 m (13'-10" x 27'-3" x 13'-10")	Dimensions of largest part:	6.5 m x 0.80 x 0.60 m (21'-4" x 2'-8" x 2'-0")
Protective Surfacing Area (DIN EN 1176):	7.2 m x 11.8 m	Weight of heaviest part:	190 kg (419 lbs)
Protective Surfacing Area (ASTM 1487):	7.9 m x 12.3 m (25'-11" x 40'-5")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	49.5 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	61.2 m² (659 sf)		

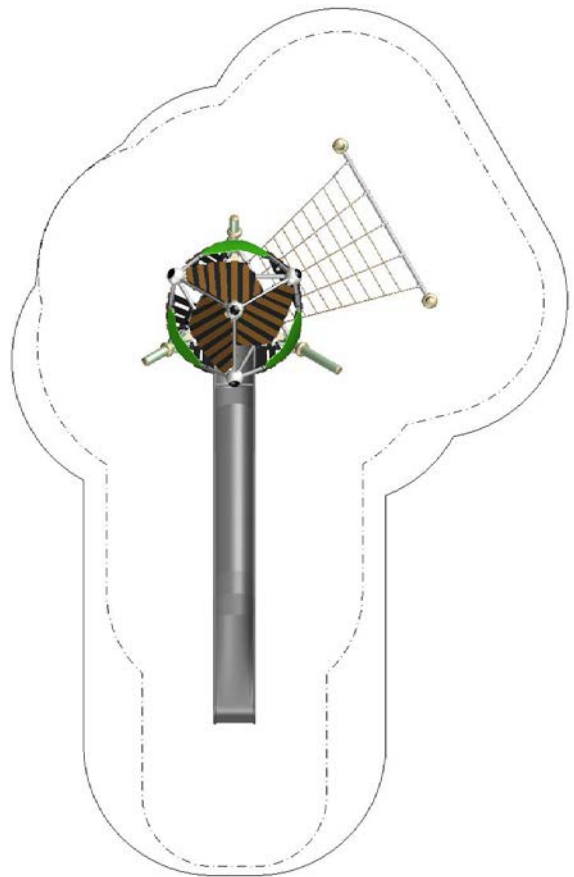
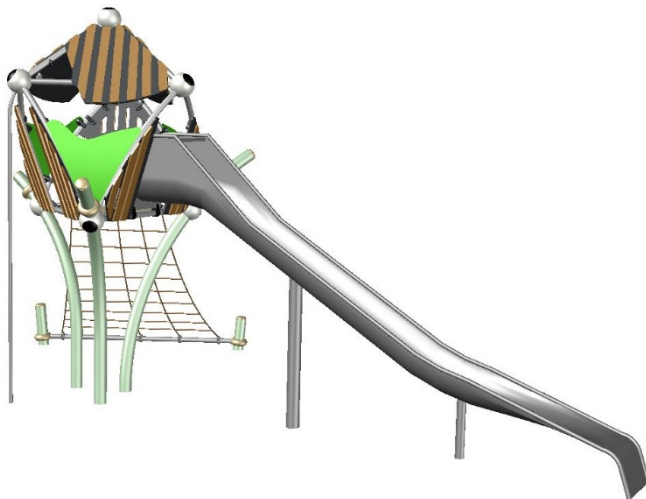

Berliner
 Berliner Seilfabrik
 Play Equipment Corporation
 96 Brookfield Oaks Drive, Suite 140
 Greenville, SC 29607

T + 1 864 627 1092
 F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com



Trii2.08– Product Specification



Technical Data.

The following text can also be used for tenders.

- 1 trii2 tree house
- 1 access net
- 1 sliding pole
- 1 straight slide

Posts:

Steel pipes Ø 133 mm (5'-1/4"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; horizontal pipes are stainless steel Frameworkx-®tubes, Ø 60.3 m (2 3/8"), wall thickness 2.0 mm (1/16")

Tube framework:

A combination of straight and bended stainless steel Frameworkx-®tubes, Ø 60,3 m (2 3/8"), material AISI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint

Nodes:

Frameworkx-aluminum ball connectors; Ø 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTM TT net tensioning system; securely closed with durable EPDM- caps

Connections:

Number of mechanical components as less as possible; all bolts and nuts exposing permanently to the weather consist of stainless steel

Bamboo panels:

Bamboo strips 90 mm, (3'-1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework

Access net:

Rope Ø 16 mm (5/8"), mesh size 300 x 300mm (11-13/16"x11-13/16"), rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic)

Sliding pole:

Stainless steel pipe, Ø 40 mm (1 1/2"); material AISI304 (DIN 1.4301), connected to the main structure at a Frameworkx-aluminum ball connector, Ø 250mm (9 13/16")

Straight box slide:

Straight box slide made of stainless steel; the cheeks are welded with stainless steel handrails; afterwards smoothed and polished


Berliner
Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com

