

Freeride

HodgePodge



Published: June 2023

Freeride

Product Specification

HodgePodge Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All HodgePodge Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated recycled aluminium connectors, high density polyethylene (HDPE) panels and ITR-bearings for maximum safety and durability.

Get inspired! Freeride is both a seesaw and a lounge simultaneously and offers numerous options to exercise and chill out. Whether on your own or with others: your imagination knows no limits. A special rubber bearing system provides the needed balance!

Freeride

90.260.802

	Product Family	HodgePodge
	Length x Width x Height (m) Length x Width x Height ("')	2,3 x 1,4 x 0,7 7-5 x 4-5 x 2-3
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("')	5,3 x 4,4 5,9 x 5,0 16-4 x 19-4
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("')	1,03 3-5
	Age	5
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	18,8 261,5
	Number of Foundations	4
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	0,4 14,2
	Number of skilled Installers required	2
	Installation Time without Foundation	2 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("')	2,3 x 1,3 x 1,6 7-7 x 4-4 x 5-3
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	100 220
	Shipping Volume (m³) Shipping Volume (ft³)	5,6 198
	Total Weight (kg) Total Weight (lbs)	120 265
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Tubes:


Bent Frameworkx®- stainless steel tubes, Ø 60.3 mm (2 3/8"), smoothed and brushed.
Connected to Frameworkx®-aluminum ball connectors, Ø 250 mm (9-13/16").

Bearing:

Axis held by encapsulated rubber cushioning system mounted in Frameworkx®-aluminum ball connectors; Ø 250 mm (9-13/16"). Securely closed with durable EPDM- caps.

Coating:

EPDM-rubber-coating area within the surface.

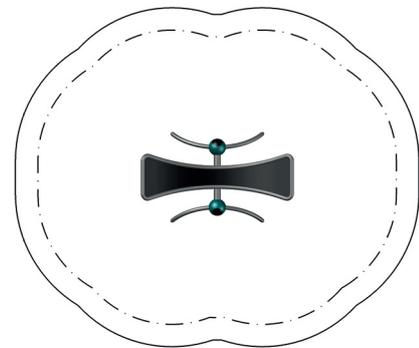

1:200