



**Disk XL**

The disc for the entire family! With a diameter of 2.3 metres, the Disk XL impresses with its size without losing any of its elegance. G-forces can be experienced even more intensely here.



**Disk XL – at a glance.**



Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>1 pc.</b>
Item Number:	<b>90.260.301.2</b>	Concrete Volume C20/C25:	<b>0.8 m<sup>3</sup> (14.2 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>0.8m (2'-8")</b>	Installation Time without foundation:	<b>2 hours</b>
Length x Width x Height:	<b>2.26 m x 2.26 m x 0.8 m</b> <b>(7'-5" x 7'-5" x 2'-8")</b>	Dimensions of largest part:	<b>2.26 m x 2.26 m x 0.8 m</b> <b>(7'-5" x 7'-5" x 2'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>8.3 m x 8.3 m</b>	Weight of the heaviest part:	<b>140 kg (309 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>6.0 m x 6.0 m</b> <b>(19'-9" x 19'-9")</b>	Shipping Volume:	<b>4.3 m<sup>3</sup> (152 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>53.5 m<sup>2</sup></b>	Shipping Weight:	<b>140 kg (309 lbs)</b>
Minimum space required ASTM 1487:	<b>27.5 m<sup>2</sup> (297 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 010256 0280</b> <b>TÜV Product Service</b>

  
**Berliner**  
 Berliner Seilfabrik GmbH & Co.  
 Lengeder Straße 2/4  
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
 www.berliner-seilfabrik.com



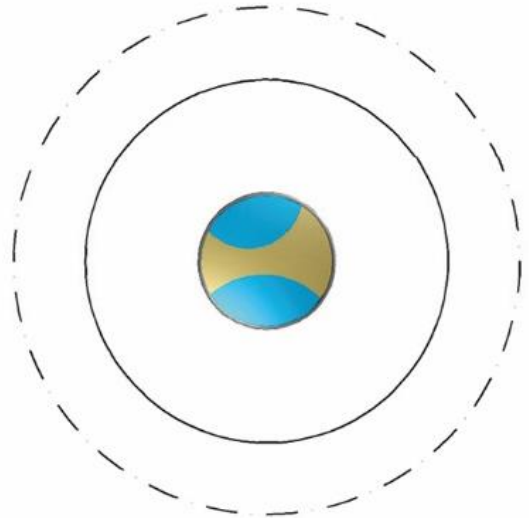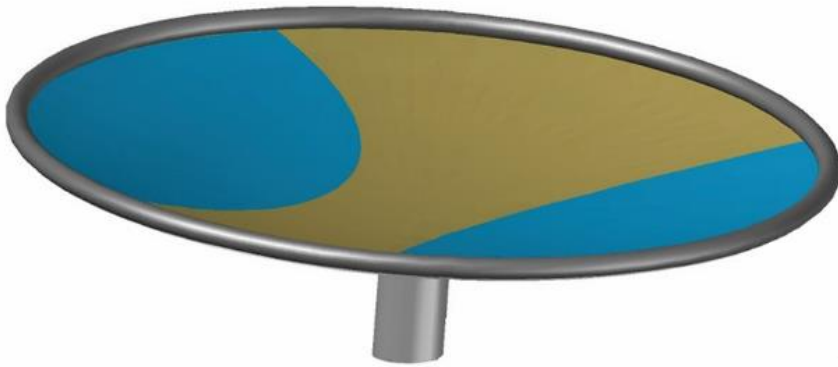

### Technical Data.

The following text can also be used for tenders.

#### Turntable:

concave stainless steel bowl, the cheeks are welded with stainless steel handrails Ø 60,3 mm (2 3/8"). Total diameter approx. 2260 mm (7'-5")

#### Stand:

5° inclined stainless steel base tube Ø 193,7 mm (0'-8") with stainless steel cover tube Ø 219,1 mm (0'-9")



#### Bearing:

Fully encapsulated bearing

#### Coating:

EPDM-rubber-coating area within the Disk

**When following DIN EN 1176 protective surfacing suitable for a free fall height of 1000 mm or more has to be used.**

