
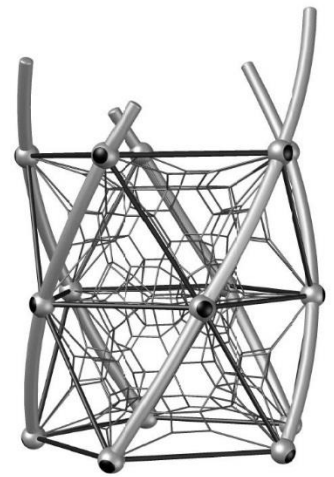
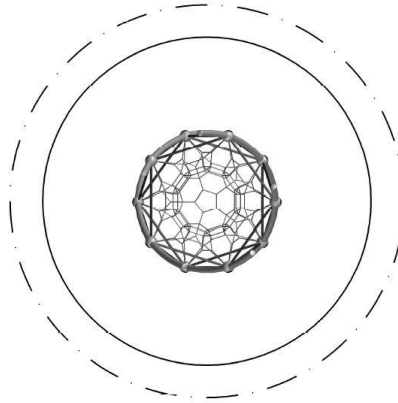


DNA Tower.02 – Product Specification

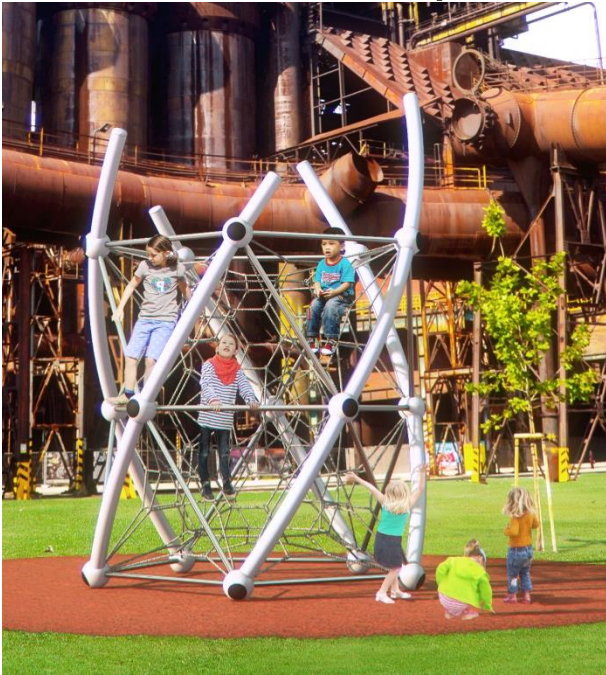

DNA Tower.02

Incorporating a climbing net of 18,34 m³, this smallest in the new line up of climbing towers nevertheless offers a considerable play volume which many children can climb about in. At the same time, thanks to the open and accessible nature of its de-sign, it's almost see-through in appearance. Ideal for playgrounds!

DNA Tower.02 – at a glance.

Produkt Family:	Greenville	Number of Foundations:	5 pc
Item Number:	90.295.012	Concrete Volume C20/C25:	2.7 m³ (96 ft³)
Children's Age:	5+	Number of skilled installers required:	3
Fall Height (DIN EN 1176):	2.94m (9'-8")	Installation Time without foundation:	8 hours
Length x Width x Height:	3.1 x 3.1 x 4.4 m (10'-2" x 10'-2" x 14'-6")	Dimensions of largest part:	1.6 m x Ø 0.2 m (5'-3" x Ø 0'-8")
Protective Surfacing Area (DIN EN 1176):	8.1 x 8.1 m	Weight of heaviest part:	Upon request
Protective Surfacing Area (ASTM 1487):	6.8 x 6.8 m (22'-4" x 22'-4")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	51.6 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	36.4 m² (826 sf)		

Technical Data.

The following text can also be used for tenders.

DNA posts:

Bended Terranos®-Steel pipes, Ø 133 mm (5'-1/4"), wall thickness 5 mm (3/16"), with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Tube framework:

Stainless steel tubes; Ø 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process possible

Nodes:

Framework®- aluminum ball connectors; Ø 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTM TT net tensioning system; securely closed with durable EPDM- caps

Spatial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings, joint-ferrule, connecting-clamps and barrel-ferrule (no plastic connections); in situ-replaceable rope strands


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

