

Neptun.18 – Product Specification



Univers – Classics among rope playground equipment

Net structures offer hours of fun and adventure on several levels – climbing and swinging, up and down, horizontally and vertically – space on earth.

The original spatial nets: Born over 40 years ago as a play concept, continuously further developed in form and detail, still popular even after several generations.

Neptun.18 – At a glance.



Product Family:	Univers	Number of Foundations:	6 pc.
Item Number:	90.141.103	Concrete Volume C20/C25:	3.65 m³ (129 ft³)
Children's Age:	5+	Number of skilled installers required:	4
Fall Height (DIN EN 1176):	2.50 m (8'-3")	Installation Time without foundation:	8 hours
Length x Width x Height:	10.4 m x 5.4 m x 6.6 m (34'-0" x 17'-8" x 21'-6")	Dimensions of largest part:	9.0 m x 2.3 m x 2.1 m (29'-7" x 7'-7" x 6'-11")
Protective Surfacing Area (DIN EN 1176):	13.8 m x 10.0 m	Weight of heaviest part:	160 kg (353 lbs)
Protective Surfacing Area (ASTM 1487):	15.6 m x 12.1 m (51'-2" x 39'-9")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	96.9 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	121.0 m² (1,302.4 sf)		


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Neptun.18 – Product Specification

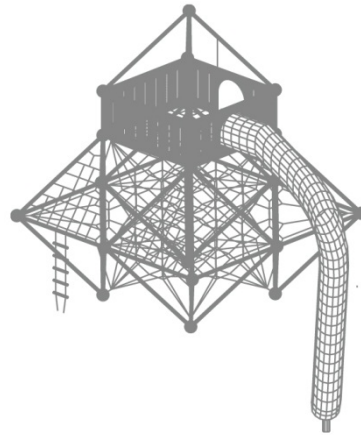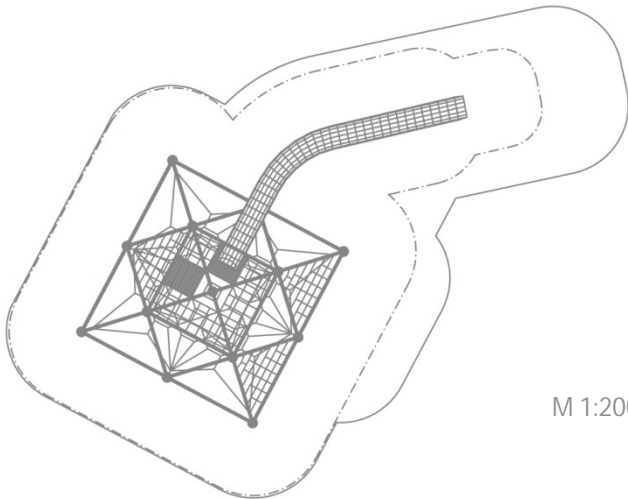

Technical Data.

The following text can also be used for tenders.

- Neptun
- Access net
- Rope ladder
- Curved tube slide

Members:

Framework-steel tubes, \varnothing 2 3/8" (60.3 mm); anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating.

Nodes:

Framework-aluminum ball connectors, \varnothing 9-13/16" (250 mm); anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating; incorporating the unique Astem TT net tensioning system, securely closed with durable ebonite caps.

Ropes:

U-Rope-round strand ropes with galvanized steel cores, \varnothing 5/8" (16 mm); external strands are covered with high abrasion resistant and UV-resistant polyester-yarn.

Spatial netting:

Rope crossing points localized by durable, drop forged aluminum-cloverleaf rings; in situ-replaceable rope lines (no special tools required).

Planar netting:

Rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic).

HDPE Platten:

HDPE plates as wall panels made of abrasion-proofed plastic (t=19mm; t=3/4").

Access net:

Access net, width 1500mm (59-1/16"), mesh width 250 x 250mm, connected to horizontal member of module with cast aluminum rope clamps. Fixed to the ground with two foundation brackets attached to a horizontal pipe.

Rope ladder:

Width 290 mm (11-7/16"), distance between rungs 250-300 mm (9-13/16" to 11-13/16"), rungs comprised of Nylon 6.6, connected to horizontal member of net structure with cast aluminum rope clamps, fixed to the ground with a galvanized anchor plate.

Curved slide:

Attached to one of the entrance panels, comprised of plastic or stainless steel AISI304 (DIN 1.4301) with 51,5°-curve; Start height 3550mm (11- 7 3/4"); equipped with BSF-start bracket and one support.

