

Pentagode M.01 – Product Specification



Pentagode – Plenty of room to play right to the top

The Pentagode offers children the excitement of climbing high with plenty of space for lots of children to play.

The Pentagode is designed for playing and climbing right to the top. Its pagoda-like proportions set an original accent in the playscape that is eye-catching and play motivating in a magical way.

Pentagode M.01 –At a glance.


Product Family:	Pergode	Number of Foundations:	11 pc.
Item Number:	90.180.057	Concrete Volume C20/C25:	6.9 m³ (243.7 ft³)
Children's Age:	5+	Number of skilled installers required:	3
Fall Height (DIN EN 1176):	1.49 m (4'-11")	Installation Time without foundation:	10 hours
Length x Width x Height:	17.2 m x 10.5 m x 5.1 m (56'-5" x 34'-5" x 16'-7")	Dimensions of largest part:	ø 0.1 m x 4.8 m (ø 0'-4" x 15'-9")
Protective Surfacing Area (DIN EN 1176):	20.2 m x 13.5 m	Weight of heaviest part:	230 kg (507.1 lbs)
Protective Surfacing Area (ASTM 1487):	20.9 m x 14.1 m 68'-5" x 46'-5")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	141.2 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	162.3 m² (1,747.0 sf)	Certificate according to DIN EN 1176:	No.: Z2 16 01 10256 258 TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Pentagode M.01 – Product Specification

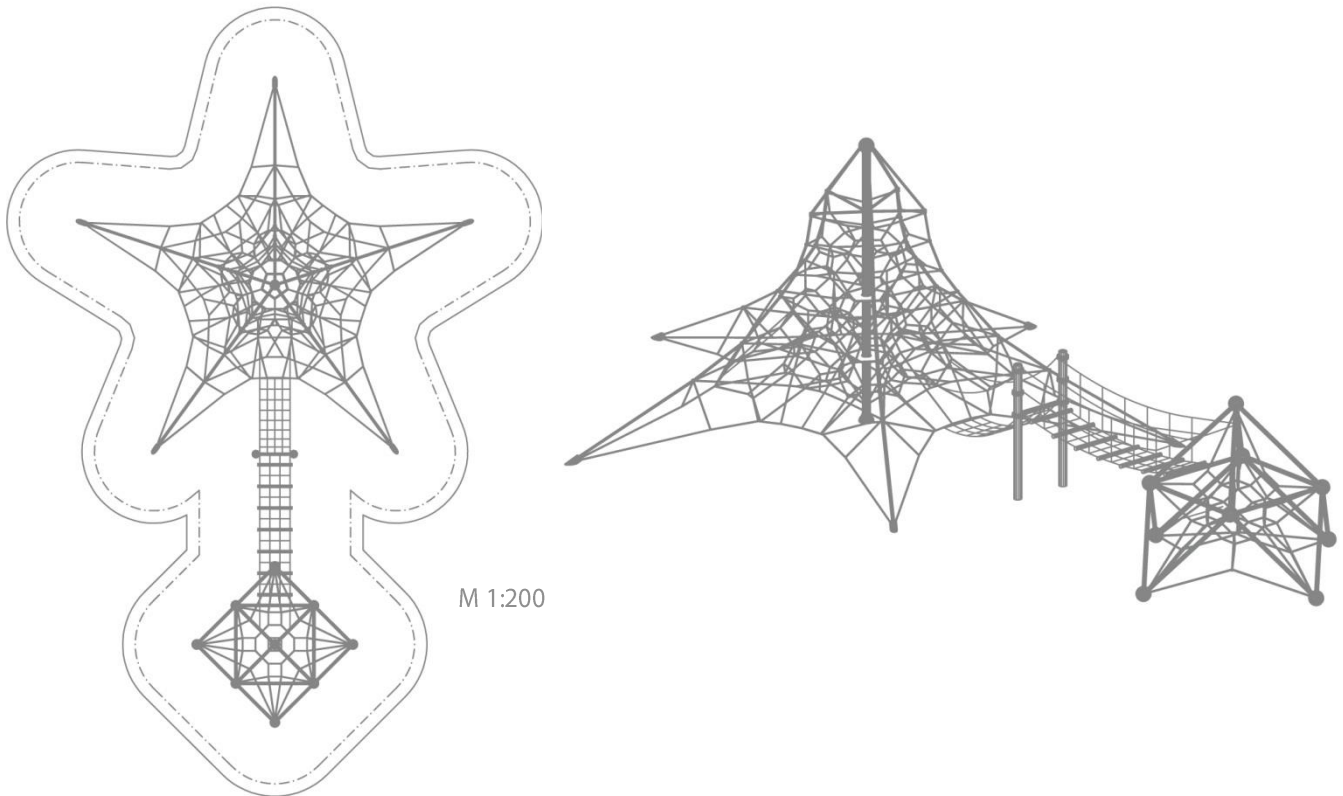

Technical Data.

The following text can also be used for tenders.

- **Pentagode M**
- **Transition net**
- **Suspension bridge**
- **Mars**

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

Central mast:

Steel post 133 mm (5 1/4"), wall thickness 5 mm (3/16"), anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Mast node:

Framework-aluminum ball connector; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; with inlying net tensioning system, secured with a durable EPDM-cap

External bracing cables:

Two parallel U-Rope-round strand ropes with steel cores; galvanized wires surround the core, external strands covered with non-abrasive UV-resistant Polyester-yarn; Ø 16 mm (5/8"); load to failure is 65 kN per cable

Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM-caps




Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Pentagode M.01 – Product Specification



Technical Data.

Posts:

Steel pipes \varnothing 133 mm (5 1/4"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Transition net:

Rope \varnothing 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

Suspension bridge:

Rope \varnothing 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic); with in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps

Tube framework (Mars):

Framework-steel tubes, \varnothing 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process


Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

