

Tetragode 5350 – Product Specification



Tetragode – Center post structure of the product group Pergode

Come on and climb to your next level! —The Tetragode 5350 leads you to an altitude beyond 5 meters.

Tetragode 5350 –At a glance.

Product Family:	Pergode	Concrete Volume C20/25:	5,2 m³
Item Number:	71.200.053.50	Number of skilled installers required:	3
Children's Age:	5+	Installation Time without foundation:	6 h
Fall Height (DIN EN 1176):	1,35 m	Dimensions of largest part:	Ø 0,127 x 5,7m
Length x Width x Height:	8,16 m x 8,16 m x 5,85 m	Weight of heaviest part:	200 kg
Protective Surfacing Area (DIN EN 1176):	11,2 m x 11,2 m	Shipping Volume:	4,2 m³
Minimum space required DIN EN 1176:	93,6 m²	Spare part guarantee:	lifelong
Number of Foundations:	5	Certificate according to DIN EN 1176:	Z2 16 01 10256 251 TÜV Product Service

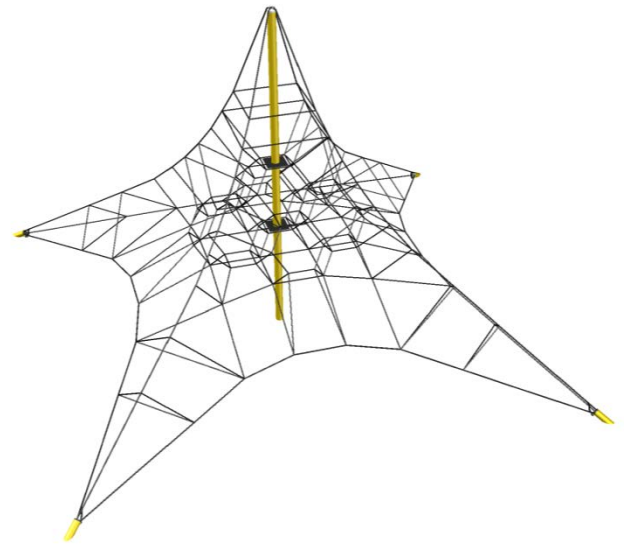
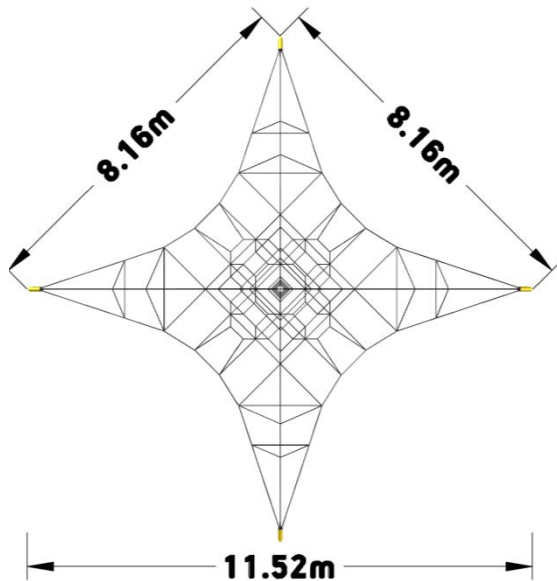

Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com



Tetragode 5350 – Product Specification



Technical Data.

The following text can also be used for tender.

Central mast climbing structure:

A fourfold suspended climbing net with border cables (rope diameter \varnothing 18 mm) including a spatial net (rope diameter \varnothing 20 mm) and a central steel mast. The four bracing devices with encapsulated clamping system are mounted on the surface of the outer foundations

Central Mast:

Galvanized steel post \varnothing 127 mm

Outer clamping points:

Steel post \varnothing 101.6 mm on steel plates 787 x 300 x 12 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Center supporting point

Steel post \varnothing 88.9 mm on steel base plate 500 x 500 x 12 mm, anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Spacial Netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands

