

Tetragode 7402 – Product Specification



Tetragode – Center post structure of the product group Pergode

big is not big enough! — The highest structure now available as a double to ensure enough for volume for even hordes of kids.

Tetragode 7402 – At a glance.

Product Family:	Pergode	Concrete Volume C20/25:	15,36 m³
Item Number:	71.200.074.02	Number of skilled installers required:	4
Children's Age:	8+	Installation Time without foundation:	16 h
Fall Height (DIN EN 1176):	2,14 m	Dimensions of largest part:	Ø 0,169 x 7,4 m
Length x Width x Height:	25,8 m x 15,8 m x 7,4m	Weight of heaviest part:	250 kg
Protective Surfacing Area (DIN EN 1176):	28,8 m x 18,8 m	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	251,5 m²	Spare part guarantee:	lifelong
Number of Foundations:	8	Certificate according to DIN EN 1176	No.: Z2 16 01 10256 251 TÜV Product Service





Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Tetragode 7402 – Product Specification

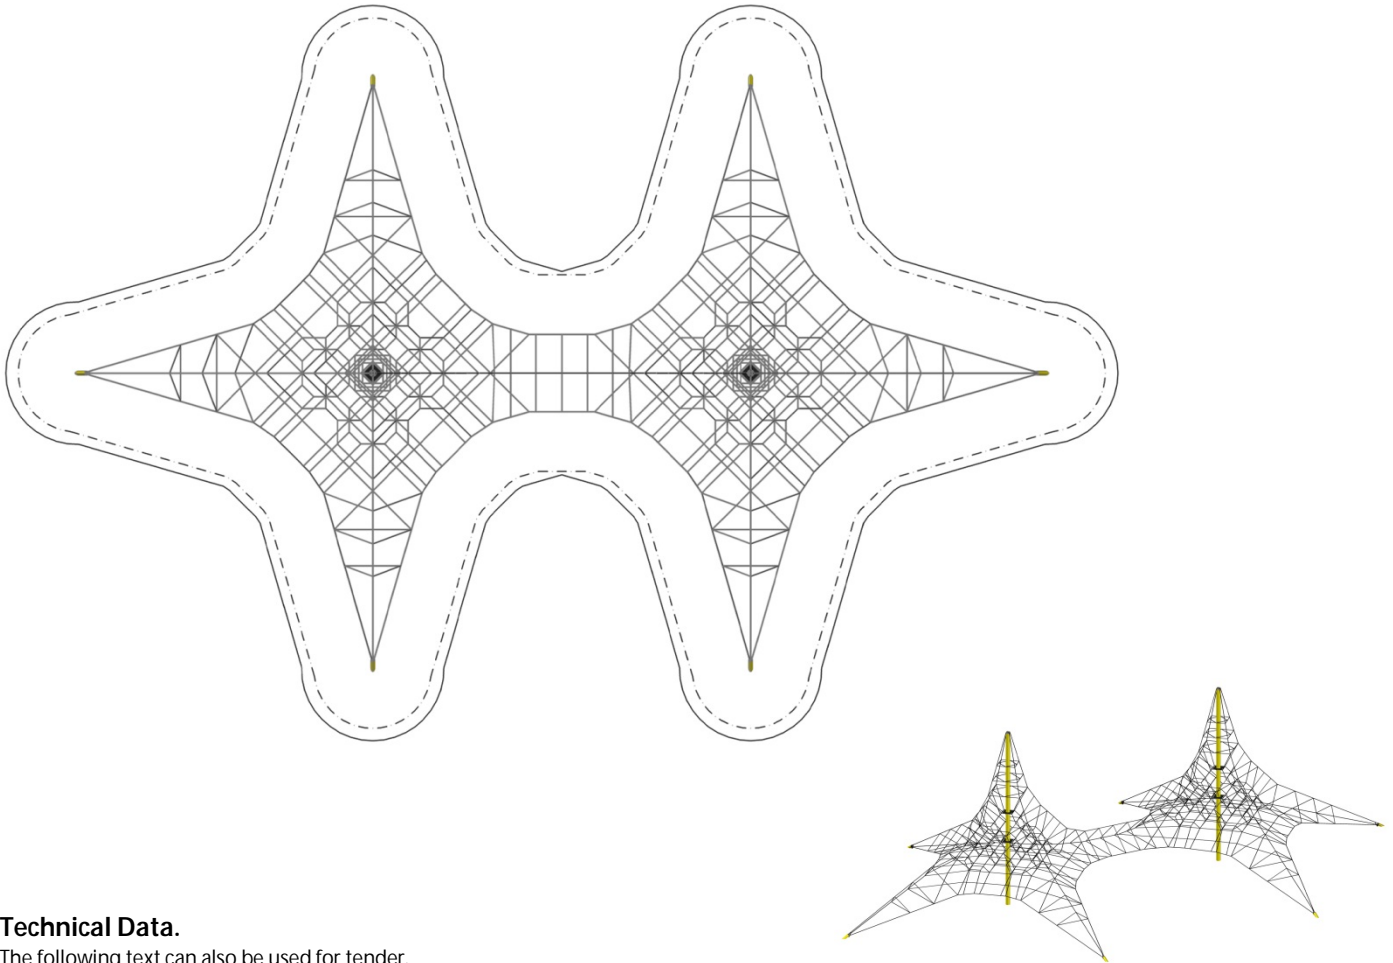

Technical Data.

The following text can also be used for tender.

- Tetragode 7400
- Tetragode 7400

Central mast climbing structure:

A fourfold suspended climbing net with border cables (rope diameter \varnothing 18 mm) including a spatial net (rope diameter \varnothing 20 mm) and a central steel mast. The four bracing devices with encapsulated clamping system are mounted on the surface of the outer foundations

Central Mast:

Galvanized steel post \varnothing 168,3 mm

Outer clamping points:

Steel post \varnothing 101.6 mm on steel plates 787 x 300 x 12 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Center supporting point

Steel post \varnothing 139,7 mm on steel base plate 500 x 500 x 12 mm, anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Spacial Netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands

