

Trigode 2901– Product Specification



Tetragode – Center post structure of the product group Pergode

Often great stuff comes in small packages! — With just a triangular footprint it offers a spacious net cell, ideal for smaller play areas or for early childhood play facilities.


Trigode 2901 –At a glance.

Product Family:	Pergode	Concrete Volume C20/25:	1,8 m³
Item Number:	71.200.029.01	Number of skilled installers required:	2
Children's Age:	3+	Installation Time without foundation:	4 h
Fall Height (DIN EN 1176):	1.61 m	Dimensions of largest part:	Ø 0.127 x 3.2 m
Length x Width x Height:	4,68 m x 4,06 m x 2,9 m	Weight of heaviest part:	70 kg
Protective Surfacing Area (DIN EN 1176):	7.68 m x7.06 m	Shipping Volume:	3.0 m³
Minimum space required DIN EN 1176:	33,91 m²	Spare part guarantee:	lifelong
Number of Foundations:	4	Certificate according to DIN EN 1176	Z1A 14 03 10256 100
			TÜV Product Service

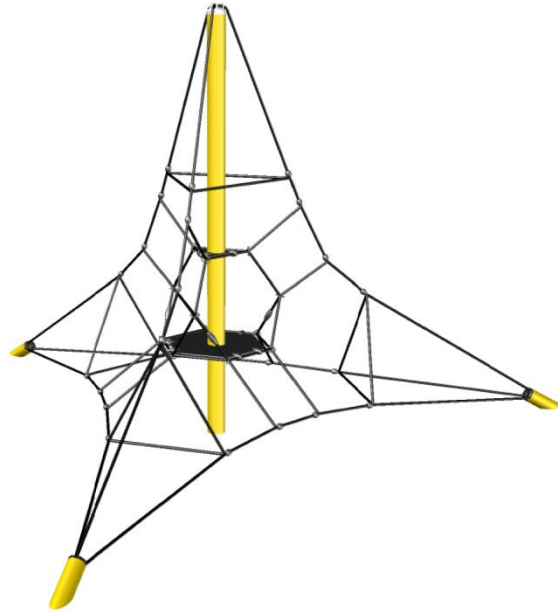


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com



Trigode 2901– Product Specification



Technical Data.

The following text can also be used for tender.

Central mast climbing structure:

A fourfold suspended climbing net with border cables (rope diameter Ø 18 mm) including a spatial net (rope diameter Ø 20 mm) and a central steel mast. The four bracing devices with encapsulated clamping system are mounted on the surface of the outer foundations

Central Mast:

Galvanized steel post Ø 127 mm

Outer clamping points:

Steel post Ø 101.6 mm on steel plates 787 x 300 x 12 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Center supporting point

Steel post Ø 88.9 mm on steel base plate 500 x 500 x 12 mm, anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Spacial Netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands

