

# Greenville

Triitopia.08 Product Specifications



Published: June 2022






## Triitopia.08

Behind the seemingly random construction lies a highly modular system that allows every Triitopia structure to be custom-designed in a shape and size to a maximal extent. A magical world of climbing and adventure where reality and fiction blend together and evolve into the unpredictable interplay of transparent and

closed façade elements that are combined in close knit, nestled and asymmetric ways.

This Triitopia world entices with maximum climbing fun on five levels. Thanks to its simple façade design Triitopia.08 fits perfectly into its surroundings.

## 90.292.4008

	Product Family	<b>Greenville</b>
	Length x Width x Height (m) Length x Width x Height ("'-")	<b>12,4 x 6,4 x 7,9</b> <b>40-7 x 20-11 x 25-10</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	<b>15,8 x 9,7</b> <b>16,7 x 10,1</b> <b>54-7 x 33-0</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	<b>2,26</b> <b>7-5</b>
	Age	<b>5</b>
	Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>62,7</b> <b>1.081,8</b>
	Number of Foundations	<b>11</b>
	Concrete Volume C20/C25 (m <sup>3</sup> )	<b>5</b>
	Number of skilled Installers required	<b>4</b>
	Installation Time without Foundation	<b>32 hours</b>
	Dimensions of largest Part (m)	<b>4,7 x 0,8 x 1,1</b>
	Weight of heaviest Part (kg)	<b>500</b>
	Shipping Volume (m <sup>3</sup> )	<b>On request</b>
	Total Weight (kg)	<b>On request</b>
	Spare Part Guarantee	<b>Lifelong</b>

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved. The following text can also be used for tenders.

### Posts:

Bent steel posts with a diameter of Ø 133 mm (5 ¼") and a wall thickness of 5 - 10 mm (13/64" - 25/64"), watertight sealed with rounded aluminium tops. Anti-corrosion treatment and colour finish: sandblasting and solvent-free epoxy-/polyester-process.

### Tubes:

A combination of straight and curved Frameworx® stainless steel tubes with a diameter of Ø 60,3 mm (2 3/8"), connected via Frameworx® aluminium balls.

### Balls:



Frameworx®-aluminium ball connectors with a diameter of Ø 250 mm (9 13/16"). Anticorrosion treatment and colour finish: sandblasted and powder-coated, securely closed with durable EPDM- caps.

### Spatial Net & Planar Net:

Rope crossing points are localised with durable, forged aluminium-alloy cloverleaf rings, aluminium-alloy ball-knots, T-connectors and barrel-ferrule (no plastic connections) in situ-replaceable rope strands.

### Ropes:

U-Rope®-round strand ropes with galvanised steel cores and a diameter of Ø 16 mm (5/8"). The external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene).

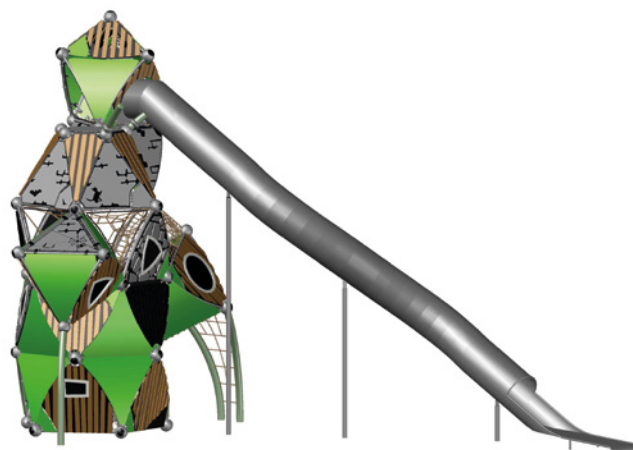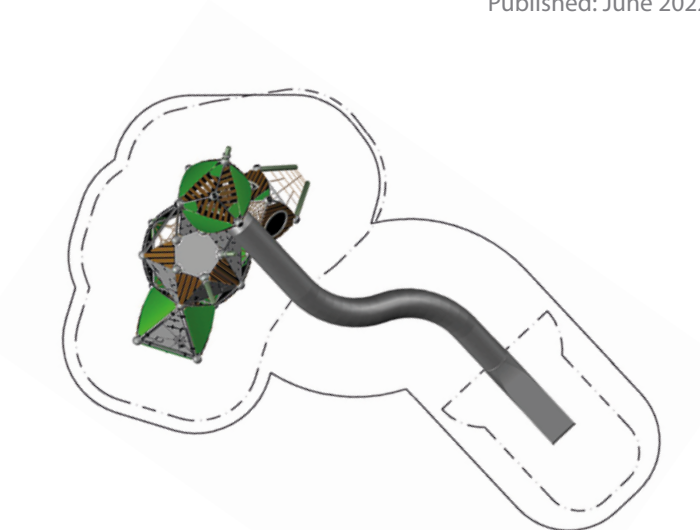

### HDPE Roof and Wall Panels:

Dyed HDPE panels with a thickness of 19 mm (3/4") for the roofs and straight, 2-coloured walls and 10 mm (25/64") for the bent side walls. The surface is grained and all edges are rounded. The attachment is made by cast aluminium pipe clamps to the tubes in the main frame.

### Bamboo Panels:

Bamboo strips 90 mm (3 1/2") mounted on HDPE-panels with 19 mm (3/4") thickness and rounded edges, attached to the tubes of the framework with aluminium plate clamps.

### Slide:

Tubular slide made of stainless steel. The side walls are welded with stainless steel tubes, ground and polished, fastened with cast aluminium plate clamps to the respective tube in the main frame.

### Access Net:

Rope with Ø 16 mm (5/8") and a mesh size of at least 300 x 300 mm (11 13/16" x 11 13/16"). The rope crossing points localised by durable, drop forged aluminium-ballknots (no plastic).

### Safety Net Frames:

Stainless steel tube frame with Ø 26,9 mm (1 1/16") and a thickness of 2 mm (5/64"), filled with stainless steel safety nets made of steel rope with Ø 1,5 mm (1/16") and a mesh size of 40 x 75 mm (1 37/64" x 2 9/64"). The frame is fastened with cast aluminium clamps to the respective tubes in the main frame.