


# Calisthenics.01

HodgePodge





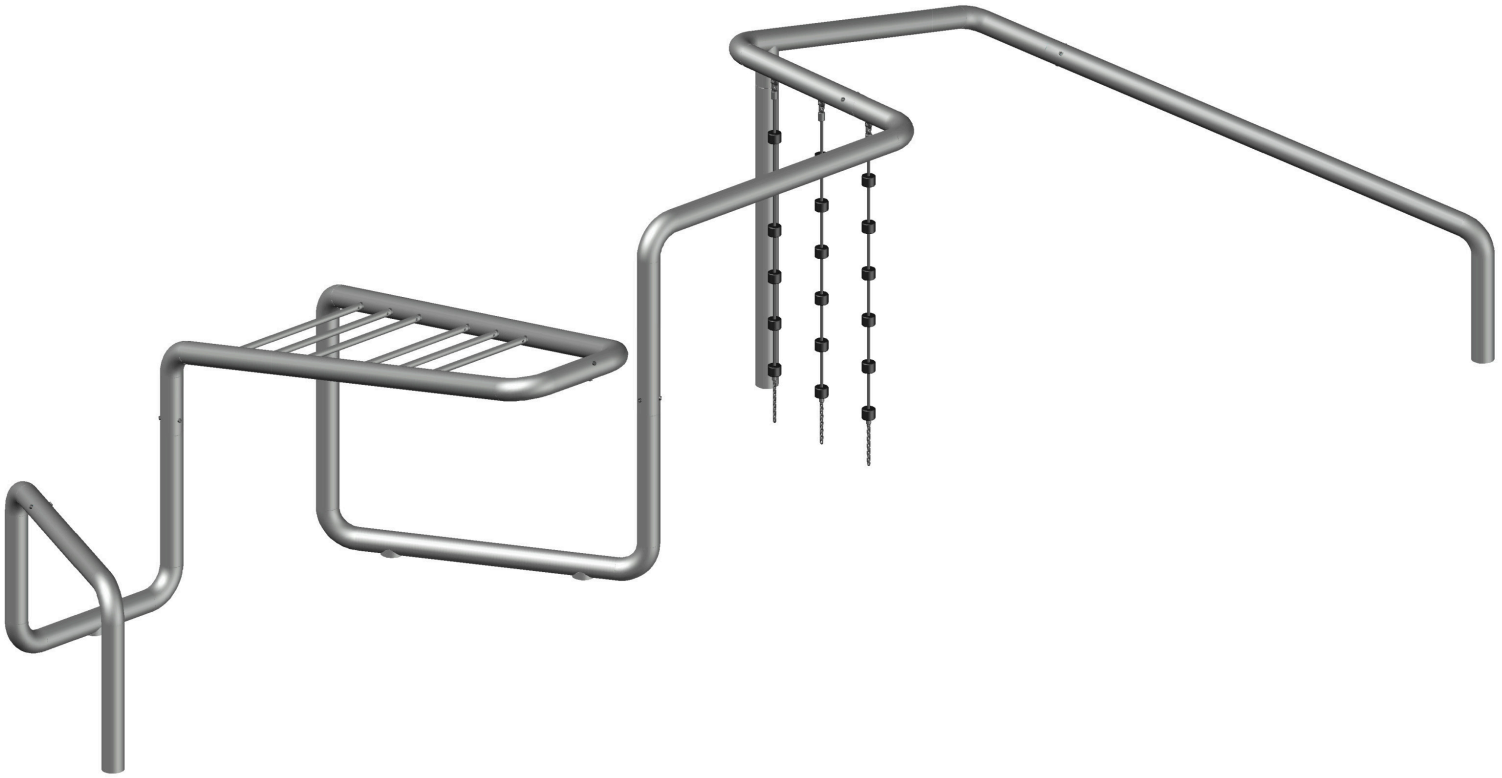












Published: August 2023

## Calisthenics.01

### Product Specification

This is where it gets sporty! Pull-ups, dips, and push-ups: Expand the range of your park or playground with our large and small Calisthenics Installations for the physical activity of young people and adults.

## 95.190.553

	Product Family	<b>HodgePodge</b>
	Length × Width × Height (m) Length × Width × Height ("")	<b>9,8 × 3,2 × 2,4</b> <b>31-11 × 10-5 × 7-10</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	* * *
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	* *
	Age	
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	* *
	Number of Foundations	<b>5</b>
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	<b>5,6</b> <b>200</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>4 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>3.5 × 0.6 × 0.65</b> <b>11-6 × 2-0 × 2-2</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>201</b> <b>450</b>
	Shipping Volume (m³) Shipping Volume (ft³)	<b>16,22</b> <b>573</b>
	Total Weight (kg) Total Weight (lbs)	<b>1860</b> <b>4100</b>
	Spare Part Guarantee	<b>Lifelong</b>

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

\* Safety areas as well as free fall height are determined according to a play equipment standard or relevant outdoor fitness standard, depending on the installation. Individual planning is necessary.

## Technical Data

Technical changes are reserved.  
The following text can also be used for tenders.

### Tubes:

Steel pipes, Ø 133 mm (5 ¼"), wallthickness 7,1 mm (9/32"). Anti-corrosion treatment and color finish: sandblasting, solvent-free epoxy-/ polyester-process.

### Pullup Bars:

Stainless steel pipes Ø 40 mm (1 9/16"), wallthickness 5 mm (3/16") smoothed and polished.

### Climbing Rope:

Rope Ø 18 mm (11/16") with durable ebonite cylinders. Distance between cylinders approx. 300 mm (11 13/16"). The ebonite cylinders are fixed to the rope with aluminum ferrules.

