

Calisthenics.03

HodgePodge



Published: September 2024
















Calisthenics.03

Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Calisthenics.03 offers countless fitness opportunities on horizontal bars of different heights, a balance bar, wall bars, and a monkey swing. The modular nature of the system, with its posts and Terranos clamps, allows for the creation of multifaceted calisthenics equipment of any size.

95.190.564

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	9,4 × 4,8 × 3,2 30-10 × 15-6 × 10-4
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	* * *
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	* *
	Age	
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	* *
	Number of Foundations	10
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	3,7 130,67
	Number of skilled Installers required	3
	Installation Time without Foundation	8 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	2,8 × 1,6 × 0,1 9-3 × 5-3 × 0-4
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	120 264,6
	Shipping Volume (m³) Shipping Volume (ft³)	66,6 235,2
	Total Weight (kg) Total Weight (lbs)	1200 2646
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

* Safety areas as well as free fall height are determined according to a play equipment standard or relevant outdoor fitness standard, depending on the installation. Individual planning is necessary.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 mm (3/16") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process .

Spheres:



Framework®- aluminum ball connectors, Ø 200 mm (7 7/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. Securely closed with durable EPDM-caps.

Terranos®- Clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Tubes:

Framework®- stainless steel tubes, Ø 38 mm (1 1/2") and Ø 60,3 mm (2 3/8"), smoothed and brushed.

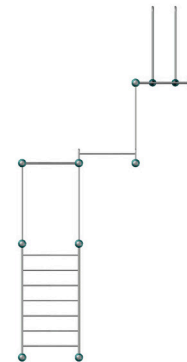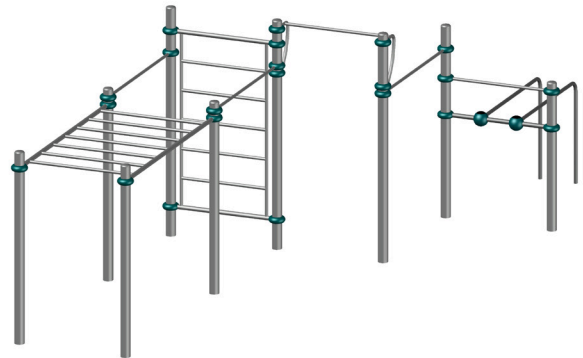

1:200