

HodgePodge

Sand Workshop Product Specifications





Published: March 2022

Sand Workshop

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Whether it's a construction site, bakery or gravel plant, the bucket on the chain hoist of the sand workshop offers countless possibilities for role-playing games.

96.180.094

 Product Family	HodgePodge
 Length x Width x Height (m) Length x Width x Height ("'-")	1,3 x 2,1 x 3,2 4-0 x 5-10 x 10-3
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	4,3 x 4,8 4,9 x 5,5 16-0 x 17-10
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	0,97 3-3
 Age	5
 Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	15,2 221,8
 Number of Foundations	3
 Concrete Volume C20/C25 (m³)	1
 Number of skilled Installers required	2
 Installation Time without Foundation	3 hours
 Dimensions of largest Part (m)	4,2 x 0,2 x 0,6
 Weight of heaviest Part (kg)	80
 Shipping Volume (m³)	2.4
 Total Weight (kg)	280
 Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved. The following text can also be used for tenders.

Post:

The bent steel post has a diameter of Ø 133 mm (5 ¼") and a wall thickness of 5 mm (¾").

Ball:

The Frameworx®-aluminium ball with a diameter of Ø 250 mm (9 13/16") serves as a connecting element and is securely closed with a durable EPDM cap.



Tubes:

The steel tubes have a diameter of Ø 60.3 mm (2 3/8") and a wall thickness of 2.9 mm (1/8").

Terranos clamps:

The two-piece Terranos® aluminium clamps are used in conjunction with various connections for the height-adjustable connection to the posts. The shackle and Frox connections for ropes and moving parts and when connecting stainless steel chains and posts, the clamps with Chrox connection are used.

Post, ball, tubes and Terranos clamps are sandblasted and powder coated in colour using an epoxy-polyester stoving process.

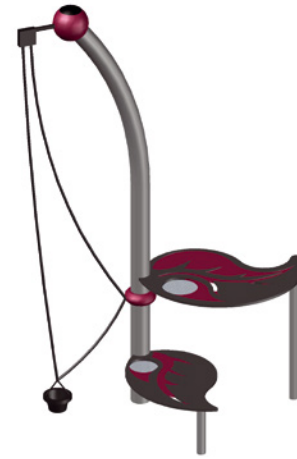

HDPE elements:

Dyed-through HDPE panels, shape-milled and with a thickness of 19 mm (¾"). The surface is grained and all edges are round milled.

Sand bucket and chain:

The bucket, made of EPDM rubber with steel inlay, is connected to the bent post by a linked chain and the sand bucket by flange, both made of stainless steel.