

Side-by-Side Swing

HodgePodge



Published: February 2024

Side-by-Side Swing Product Specification
















HodgePodge Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All HodgePodge Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated recycled aluminum connectors, high density polyethylene (HDPE) panels and ITR-bearings for maximum safety and durability.

Swinging together is still the most fun, whether on classic seats or in the cool nest swing. And due to the low entry height of the nest swing, even the little ones will get the most fun out of swinging.

Side-by-Side Swing

Published: February 2024

90.340.055

	Product Family	HodgePodge
	Length x Width x Height (m) Length x Width x Height ("")	1,6 x 6,8 x 3,1 5-3 x 22-2 x 9-11
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	8,1 x 6,8 9,8 x 10,5 32-0 x 34-2
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,44 8-1
	Age	3
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	51,3 809,0
	Number of Foundations	3
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	1,8 63,6
	Number of skilled Installers required	2
	Installation Time without Foundation	8 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	2,9 x 0,5 x 0,2 9-7 x 1-5 x 0-8
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	100 220
	Shipping Volume (m³) Shipping Volume (ft³)	4,4 155,4
	Total Weight (kg) Total Weight (lbs)	660 1455
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Nest Swing Seat:

Ø 1200 mm (3'-11 1/4"). Galvanized steel ring covered with shock-absorbing material and wrapped with rope. Tight-knit net made of Usacord-rope Ø 16 mm (5/8") is hung into the ring. The connection parts are made of stainless steel.

Rubber Swing Seat:

The black rubber safety swing seat is mounted rotatable to the cross tube with stainless steel chains and maintenance free nylon bushes.

Spheres:

Frameworkx®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 7,1 mm (9/32") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Suspension:


U-Rope®-round strand ropes with galvanized steel cores, external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene). The diameter is 16 mm (5/8") and they are connected to the joint with steel chains.

Terranos®- Clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Tubes:

Frameworkx®- steel tubes, Ø 60,3 mm (2 3/8"), wall thickness 5 mm (13/64"). Anti-corrosion treatment and color finish: sandblasting, sensimir galvanised and solvent-free epoxy-/ polyester-process.

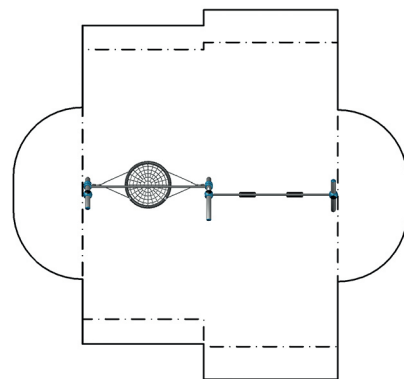

1:200