

# Spooky Rookies

## SpooRoo Combi.01 Product Specification



Published: November 2019

### SpooRoo Combi.01



Spooky Rookies promote physical development. During climbing, sliding and romping in the many different playhouses, toddlers are able to test their skills.

It is possible to combine the playhouses' shape, size and colours. A stepladder, ramp or slide offer further constructive options.

The SpooRoo Combi.01 consists of a spooky house Spoo S with a ramp and a stepladder, a spooky house Roo S with a ladder and a Spoo M with a slide, all of them connected by suspension bridges.

## 90.296.001

 Product Family	<b>Spooky Rookies</b>
 Length x Width x Height (m) Length x Width x Height ("'-")	<b>6,5 x 5,8 x 2,7</b> <b>6,5 x 5,8 x 2,7</b>
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	<b>9,8 x 8,9</b> <b>10,1 x 9,5</b> <b>33-1 x 31-1</b>
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	<b>0,9</b> <b>3-0</b>
 Age	<b>3</b>
 Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	<b>52,00</b> <b>208,46</b>
 Number of Foundations	<b>18</b>
 Concrete Volume C20/C25 (m³)	<b>1,8</b>
 Number of skilled Installers required	<b>2</b>
 Installation Time without Foundation	<b>12 hours</b>
 Dimensions of largest Part (m)	<b>2,6 x 1,3 x 0,6</b>
 Weight of heaviest Part (kg)	<b>55</b>
 Shipping Volume (m³)	<b>On request</b>
 Total Weight (kg)	<b>On request</b>
 Spare Part Guarantee	<b>Lifelong</b>
 Certified acc. to EN 1176	<b>Nr.: Z2 18 05 10256 275</b>

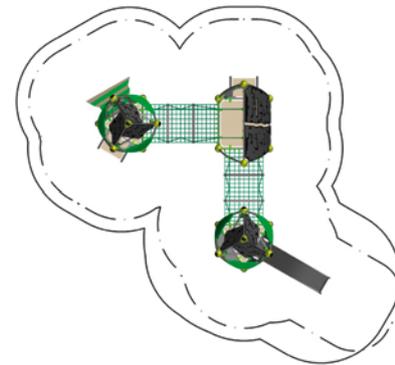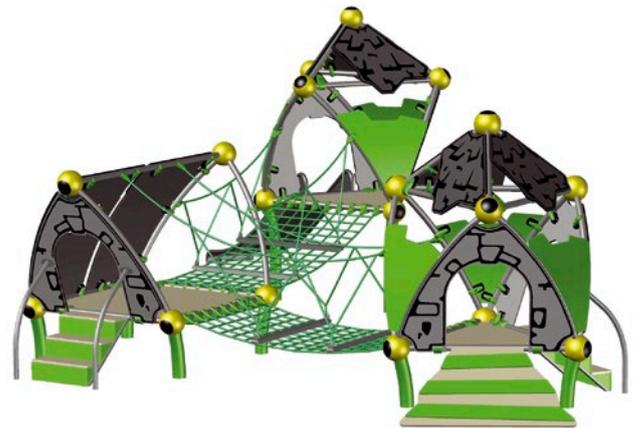

### Technical Data

The following text can also be used for tenders.

#### Included Products:

- 3 Haunted houses (Spoo S, Spoo M, Roo S)
- 2 Stepladders
- 1 Slide
- 1 Ramp
- 2 Suspension bridges

#### Posts:

Steel pipes Ø 101,6 mm (4"); wall thickness 4 mm (3/16") with a round cast aluminium post top; anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process; Cross tubes – stainless steel Frameworx®-tubes, Ø 48 mm (1 7/8")

#### Balls:

Frameworx®-aluminium ball connectors, Ø 200 mm (7 7/8"); anti-corrosion treatment and colour finish: sandblasting and solvent-free epoxy-/ polyester-process; securely closed with durable EPDM-caps

#### Panels:

HDPE-panel (roof and walls), thickness 19 mm (3/4"), panel connected to steel pipes (for more details, see posts) with cast aluminium panel clamps; non-skid HPL-panel (bottom and ramp), thickness 19 mm (3/4"), excepted bent sidepanels with a thickness of 10 mm (25/64")

#### Connections:

Number of mechanical components as less as possible; all bolts and nuts exposing permanently to the weather consist of stainless steel

#### Rope:

U-Rope®-round strand ropes with galvanised steel cores, Ø 16 mm (5/8") – unless otherwise noted; external strands are covered with non-abrasive UV-resistant Polyester-yarn

#### Ramp:

HDPE-panel (roof and walls), thickness 19 mm (3/4"), panel connected to steel pipes (for more details, see posts) with cast aluminium panel clamps; non-skid HPL-panel (bottom and ramp), thickness 19 mm (3/4")

#### Slide:

Rectangular stainless steel slide, narrow type width 0,46 m (1'-6 1/8"); side profile with stainless steel split tubes (smoothed and polished); access height 0,90 m (2'-11 7/16")

#### Stepladder:

Non-skid HPL-tiles (steps), thickness 19 mm (3/4"); curved stainless steel handrails

#### Suspension Bridges:

Rope Ø 16 mm (5/8"), narrow mesh size; Rope crossing points localised by durable, drop forged aluminium-ballknots (no plastic)