


# HodgePodge

## Kids Bounce.03 Product Specifications





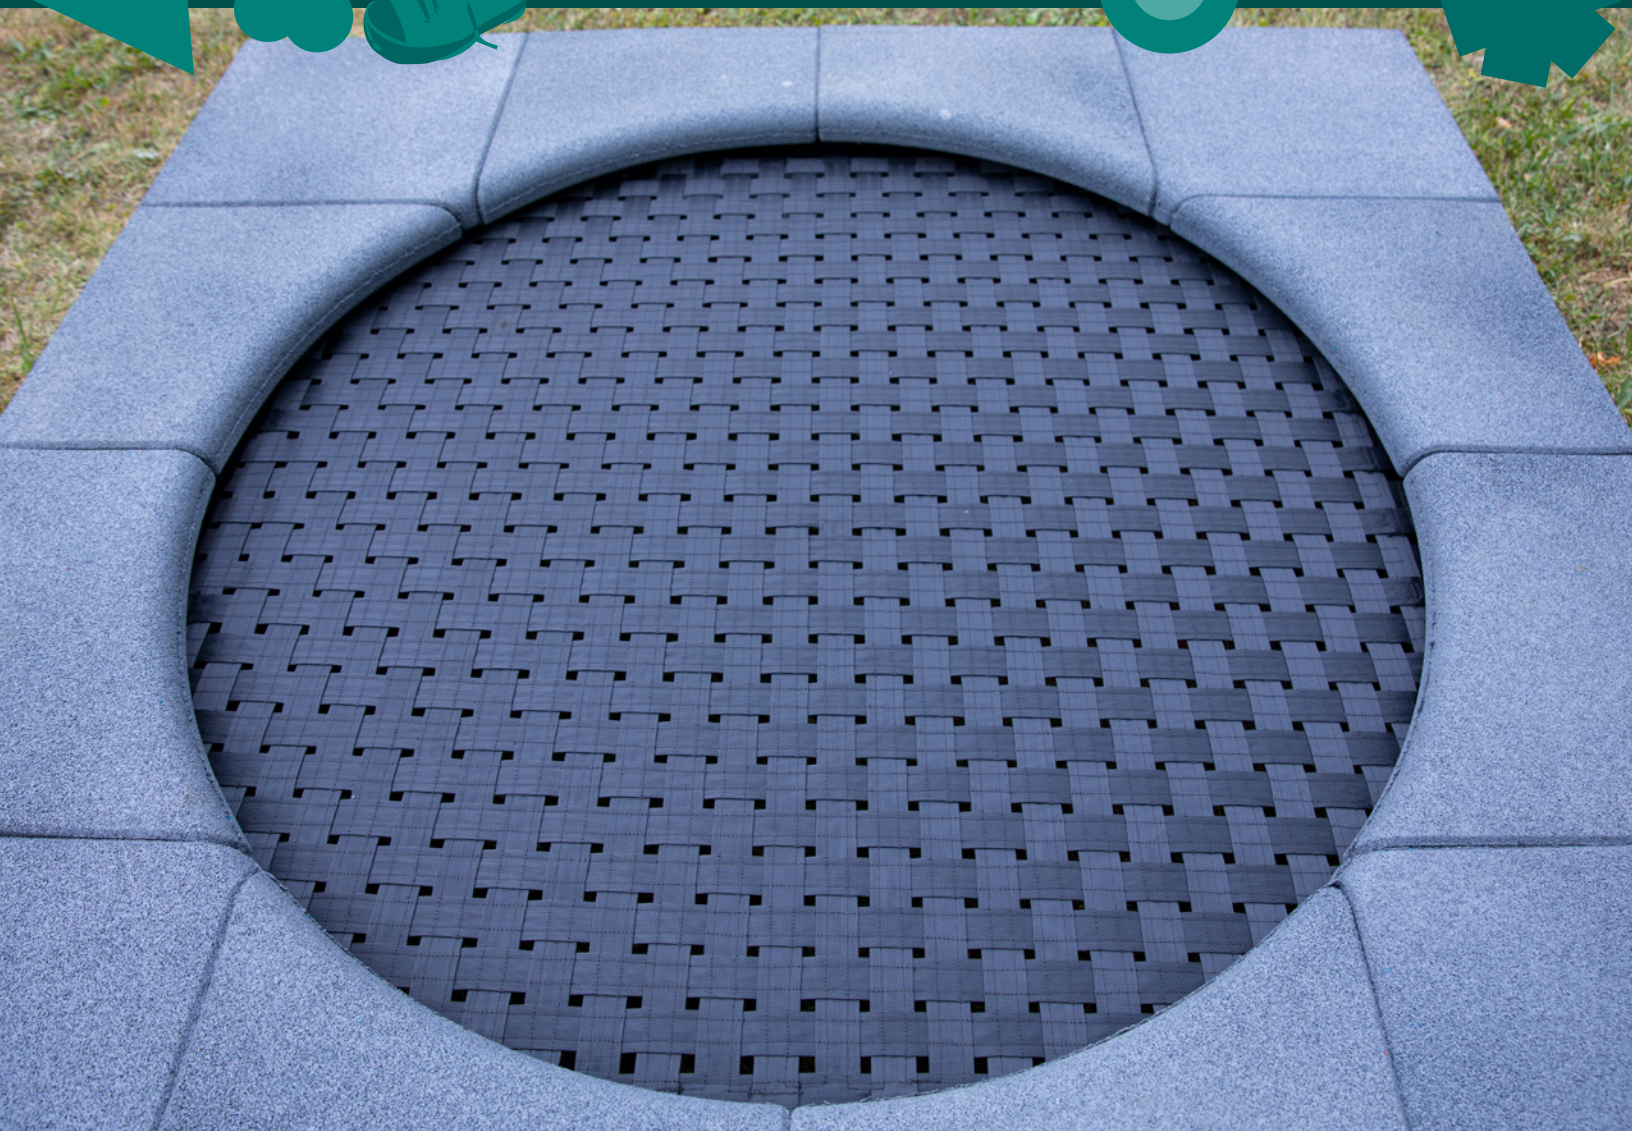










Published: March 2020


### Kids Bounce.03

Play, sports, learning and therapy are just a few keywords that belong to the “Kids Bounces”. The devices are characterized by a joint-gentle jump, as well as a pleasant fall and landing behavior. They are optimally tailored to the body of children.

The Kids Bounces are available in different sizes. Round, square and rectangular shapes – there will be something for every design concept. The Kids Bounce.03 has a usable jump surface with a diameter of 3’.

## 90.660.012.410.70

	Product Family	<b>HodgePodge</b>
	Length x Width x Height (m) Length x Width x Height ("")	<b>1,5 x 1,5</b> <b>4-11 x 4-11</b>
	Protective Surfacing Area (m²)* Protective Surfacing Area ("")*	<b>3,93 x 3,93</b> <b>16-11 x 16-11</b>
	Fall Height (m)* Fall Height ("")*	<b>0</b> <b>3-4</b>
	Age	<b>2-12</b>
	Minimum Space required (m²)* Minimum Space required (ft²)*	<b>15.5</b> <b>286.3</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>1 hour</b>
	Dimensions of largest Part ("")	<b>4-11 x 1-1 x 5-3</b>
	Weight of heaviest Part (lbs)	<b>352</b>
	Shipping Volume (ft³)	<b>28</b>
	Total Weight (lbs)	<b>352</b>
	Spare Part Guarantee	<b>Lifelong</b>



\*All safety related measurements are based on experience and professional judgement.

### Technical Data

The following text can also be used for tenders.

#### Jumping Bed:

The Jumping Bed is made of six-fold wire-reinforced belt fabric (UV-light and weather-resistant, weight 0.6 lb/ft², steel springs hot-dip galvanized).

#### Frame Profile:

Hot-dip galvanized high-quality steel is used for installation of the Frame Profile in the ground.

#### Frame Cover:

Kraiburg bonded impact protection (1 3/16"; HCl 1000) with rounded inner edges for the best safety and barrier-free access to the jumping bed (suitable for freely accessible areas).

#### Required Pit Dimensions:

5'-3" x 5'-3". Pit depth: 11 13/16", under the jump area 2'-4 3/4".

#### Jumping Bed Dimensions:

3'-6 1/8" x 3'-6 1/8", with 36 steel springs (length 7 5/8", Ø 13/16", hot-dip galvanized), jumping surface with a diameter of 3'.

#### Safety Distances:

Above 11'-5 13/16" (no trees, power lines, etc.), jumping surface with a diameter of 3'.

#### Assembly:

Pre-assembled delivery; bonded impact protection which needs to be stuck down on location. Springs and jumping bed can be easily removed for cleaning and maintenance without having to disassemble the bonded impact protection or frame.