

# Calisthenics.05

HodgePodge



Published: March 2024
















## Calisthenics.05


### Product Specification

This small calisthenics facility can complement a playground well and is also a success for the adults: pull-ups and dangles with different distances.

# Calisthenics.05

95.190.713

	Product Family	<b>HodgePodge</b>
	Length × Width × Height (m) Length × Width × Height ("")	<b>3,2 × 3,2 × 2,4</b> <b>10-5 × 10-4 × 7-10</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	 * *
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	 *
	Age	
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	 *
	Number of Foundations	<b>3</b>
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	<b>1,8</b> <b>63,6</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>3 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>0,2 × 0,9 × 2,4</b> <b>0-8 × 2-12 × 7-11</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>120</b> <b>264,6</b>
	Shipping Volume (m³) Shipping Volume (ft³)	<b>9</b> <b>315,6</b>
	Total Weight (kg) Total Weight (lbs)	<b>1050</b> <b>2315</b>
	Spare Part Guarantee	<b>Lifelong</b>

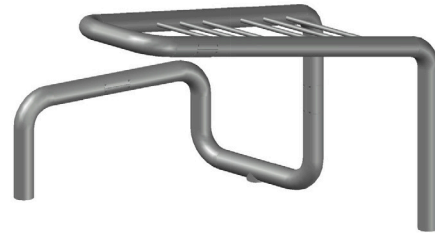

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

\* Safety areas as well as free fall height are determined according to a play equipment standard or relevant outdoor fitness standard, depending on the installation. Individual planning is necessary.

## Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

### Tubes:

Frameworkor®- steel tubes, Ø 168,3 mm (6 5/8"), wall thickness 10 mm (3/8"). Anti-corrosion treatment and color finish: sandblasting, solvent-free epoxy-/ polyester-process.

### Horizontal Bars:

Comprised of stainless steel pipe Ø 40 mm (1-9/16"), wall thickness 5 mm (3/16").