

Tower3 – Product Specification




Tower3

The vertical tower is visible from quite some distance. But what's concealed behind its bamboo panels? Climbing nets rise up four levels to the apex. A slide on the second level offers an exit route.

Tower3 – at a glance.

| | | | |
|----------------------------|--|--|--|
| Product Family: | Greenville | Number of Foundations: | 4 Stück |
| Item Number: | 90.295.003 | Concrete Volume C20/C25: | 7.65 m³ (271 ft³) |
| Children's Age: | 5+ | Number of skilled installers required: | 4 |
| Fall Height (DIN EN 1176): | - | Installation Time without foundation: | 16 Stunden |
| Length x Width x Height: | 5.4 m x 8.2 m x 7.3 m (17'-9" x 26'-11" x 24'-0") | Dimensions of largest part: | 7.0 m x Ø 0.2 m (23'-0" x Ø 8") |

The protective Surfacing Area and Fall Height of our Towers & Triis depend on the chosen combination and execution and be like calculated on request you.

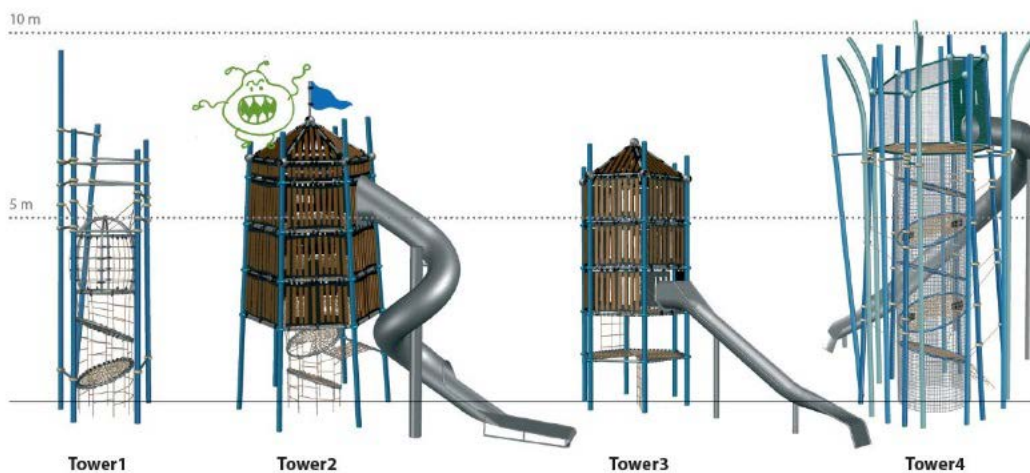


Berliner
 Berliner Seilfabrik
 Play Equipment Corporation
 96 Brookfield Oaks Drive, Suite 140
 Greenville, SC 29607

T + 1 864 627 1092
 F + 1 864 627 1178

www.berliner-playequipment.com
 info@berliner-seilfabrik.com

Tower3 – Product Specification

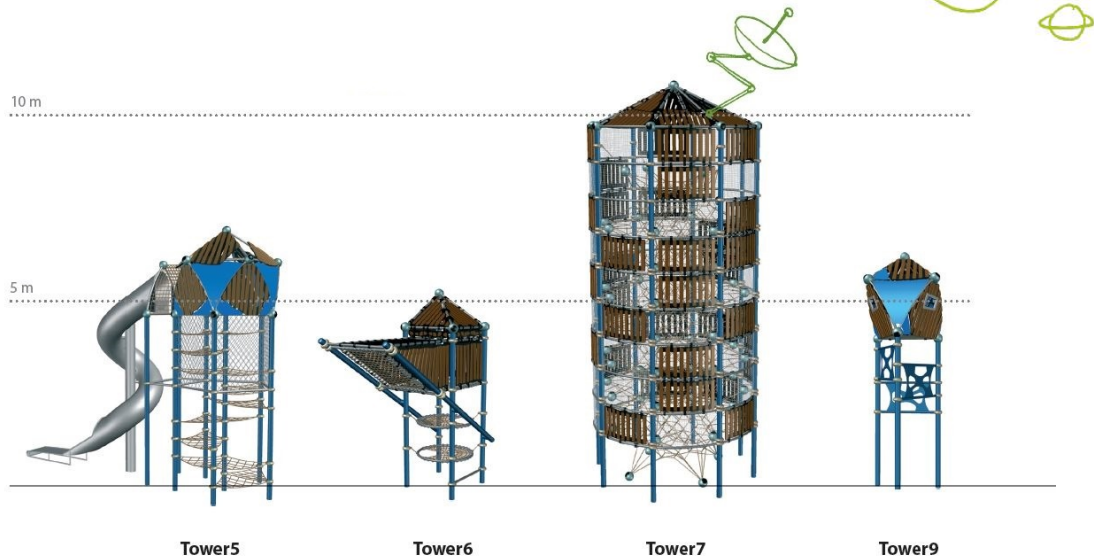

Technical Data.

The following text can also be used for tenders.

Posts:

Steel posts Ø 133 mm (5 ¼"); wall thickness 5 - 11 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Tube framework:

Stainless steel tubes; Ø 60.3 mm (2 3/8"); connected to the posts with Terranos two-part cast aluminum connecting clamps ; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Nodes:

Framework®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Planar netting:

Rope Ø 16 mm (5/8"); closed meshed; rope crossing points localized by durable, drop forged aluminum ballknots (no plastic). Openings with offset to the next net

Bamboo panels:

Bamboo strips 90 mm, (3 1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework

Straight concave slide:

Slide made of stainless steel, the cheeks are welded with stainless steel handrails, afterwards smoothed and polished; connected with aluminum-slide clamps



Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com

