


Fireball.2.1 – Product Specification



Fireball.2.1

Fireball is the best place in town for those who love to get dizzy occasionally. The rotation axis is inclined at 2°. Move your body to and around the axis and you will feel what gravity is. The Fireball is absolutely strong enough for two or more users, to take a spin.

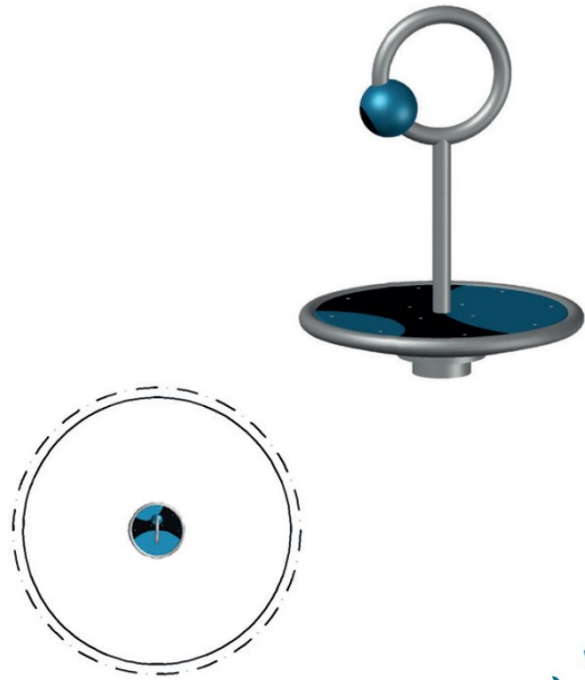

Fireball.2.1 – at a glance.

Product Family:	Playpoints	Number of Foundations:	1 pc.
Item Number:	90.260.307	Concrete Volume C20/C25:	0.25 m³ (8.83 ft³)
Children's Age:	5+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	0.86 m (2'-10")	Installation Time without foundation:	2 hours
Length x Width x Height:	1.0 m x 1.0 m x 1.3 m (3'-4" x 3'-4" x 4'-4")	Dimensions of largest part:	1.0 m x 1.0 m x 1.6 m (3'-4" x 3'-4" x 5'-3")
Protective Surfacing Area (DIN EN 1176):	5.0 m x 5.0 m	Weight of the heaviest part:	110 kg (221 lbs)
Protective Surfacing Area (ASTM 1487):	4.7 m x 4.7 m (15'-5" x 15'-5")	Shipping Volume:	1.1 m³ (243 ft³)
Minimum space required DIN EN 1176:	19.5 m²	Shipping Weight:	125 kg (276 lbs)
Minimum space required ASTM 1487:	16.9 m² (182 ft²)	Spare part guarantee:	Lifelong
		Certificate according to DIN EN 1176:	No.: Z2 15 06 10256 233 TÜV Product Service

Technical Data.

The following text can also be used for tenders.

Turntable:

Stainless steel plate Ø 960 mm (3'-2"), covered with HDPE panels, the cheeks are welded with stainless steel handrails Ø 60,3 mm (2 3/8")

Tubes:

Stainless steel tubes, Ø 60.3 mm (2 3/8")

Stand:

Stainless steel Picolino swivel stand with fully encapsulated bearing

Nodes:

Framework®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps

Covering:

Antiskid HDPE panels bolted on the turntable


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

