

## UFO.M6.01 – Product Specification



### UFOs – Spatial nets in pentagonal Framework frames

With the UFOs, children of all ages can explore play and climb galaxies where no children have gone before – for even more fun and adventure.

The compact UFOs can be combined to produce larger and more complex fleets.

#### At a glance.



Product Family:	<b>UFOs</b>	Number of Foundations:	<b>5 pc.</b>
Item Number:	<b>90.220.0602</b>	Concrete Volume C20/C25:	<b>1.3 m<sup>3</sup> (45.9 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>2.28 m (7'-6")</b>	Installation Time without foundation:	<b>12 hours</b>
Length x Width x Height:	<b>6.2 m x 6.1 m x 4.2 m (20'-3" x 19'-11" x 13'-7")</b>	Dimensions of largest part:	<b>Ø 0.1 m x 1,8 m (Ø 0'-4" x 6-0")</b>
Protective Surfacing Area (DIN EN 1176):	<b>9.7 m x 9.5 m</b>	Weight of heaviest part:	<b>30 kg</b>
Protective Surfacing Area (ASTM 1487):	<b>9.9 m x 9.8 m (32'-3" x 31'-11")</b>	Shipping Volume:	<b>Upon request</b>
Minimum space required DIN EN 1176:	<b>69.2 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>72.0 m<sup>2</sup> (775.0 sf)</b>		

  
**Berliner**  
 Berliner Seilfabrik GmbH & Co.  
 Lengeder Straße 2/4  
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
 www.berliner-seilfabrik.com

# UFO.M6.01 – Product Specification

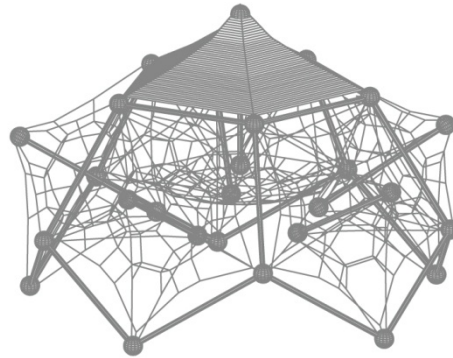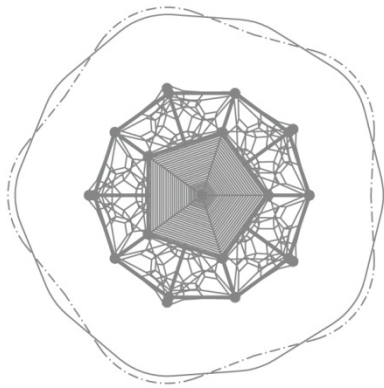

M 1:200

## Technical Data.

The following text can also be used for tenders.

- UFO.M6
- HDPE roof

### Tube framework:

Framework-steel tubes, Ø 60.3 mm (2 3/8"); anticorrosion treatment and color finish: sandblasted and powder-coated

### Nodes:

Framework-aluminum ball connectors, Ø 250 mm (9-13/16"); anticorrosion treatment and color finish: sandblasted and powder-coated, securely closed with durable EPDM- caps

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires, external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene). Rope-diameter Ø 16 mm (5/8")

### Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy ballknots (no plastic connections), in situ-replaceable rope strands (no special tools required)

### Roof:

HDPE-roof, thickness 19 mm (3/4"), connected to steel pipes with cast aluminum panel clamps



  
**Berliner**  
Berliner Seilfabrik GmbH & Co.  
Lengeder Straße 2/4  
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
www.berliner-seilfabrik.com