

Urban Design

Picadilly Circle.2.2 Product Specification



Published: June 2021
















Picadilly Circle.2.2



Urban Design Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All URBAN DESIGN Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated

recycled aluminum0 connectors, high density polyethylene (HDPE) panels and ITR-bearings for maximum safety and durability.

A ride on the Picadilly Circle is a great experience, as the speed of spinning depends on how its users work together – every ride is a unique adventure.

90.260.304

	Product Family	Urban Design
	Length x Width x Height (m) Length x Width x Height ("')	1,83 x 1,83 x 1,30 6-1 x 6-1 x 4-4
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("')	5,9 x 5,9 5,5 x 5,5 18-1 x 18-1
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("')	0,44 1-5
	Age	2-12
	Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	26.7 255
	Number of Foundations	1
	Concrete Volume C20/C25 (ft ³)	10.6
	Number of skilled Installers required	2
	Installation Time without Foundation	2 hours
	Dimensions of largest Part ("')	6-3 x 6-3 x 4-11
	Weight of heaviest Part (lbs)	441
	Shipping Volume (ft ³)	212
	Total Weight (lbs)	530
	Spare Part Guarantee	Lifelong

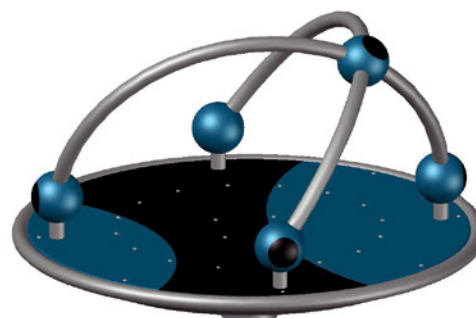

Technical Data

Technical changes are reserved. The following text can also be used for tenders.

Turntable:

The stainless steel plate with a diameter of $\varnothing 6'-1''$ is covered with HDPE plates and surrounded by a welded stainless steel tube with a diameter of $\varnothing 2 \frac{3}{8}''$.

Tubes and Balls:

The bent stainless steel tubes with a diameter of $\varnothing 2 \frac{3}{8}''$ are connected by Frameworx® aluminum balls with a diameter of $\varnothing 7 \frac{7}{8}''$, these are sandblasted, powder-coated without solvents and securely closed with durable EPDM caps.

Stand:

The fully integrated bearing unit forms a self-contained system and is therefore particularly insensitive to weather influences and requires little maintenance.

Covering:

The non-skid HDPE plates with a thickness of $\frac{3}{4}''$ are screwed flat on the turntable.