

Combi.102 – Product Specification



Combi.102

Small Greenville tree house combination with two Trii1 tree houses, connected with a bridge, an access net, ladder as entrance possibilities and a straight box slide.

Combi.102 – at a glance.

Product Family:	Greenville	Number of Foundations:	6 pc.
Item Number:	90.293.102	Concrete Volume C20/C25:	3.07 m ³ (108.42 ft ³)
Children's Age:	3+	Number of skilled installers required:	3
Fall Height (DIN EN 1176):	0.99m (3'-3")	Installation Time without foundation:	12 hours
Length x Width x Height:	7.45 m x 5.92 m x 3.13 m (24'-5" x 19'-6" x 10'-4")	Dimensions of largest part:	4.0m x 0.80 x 0.60m (13'-2" x 2'-8" x 2'-0")
Protective Surfacing Area (DIN EN 1176):	10.94 m x 8.42 m	Weight of heaviest part:	65 kg (143.3 lbs)
Protective Surfacing Area (ASTM 1487):	11.10 m x 9.61 m (36'-5" x 31'-6")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	50.25 m ²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	67.65 m ² (728.2 sf)		

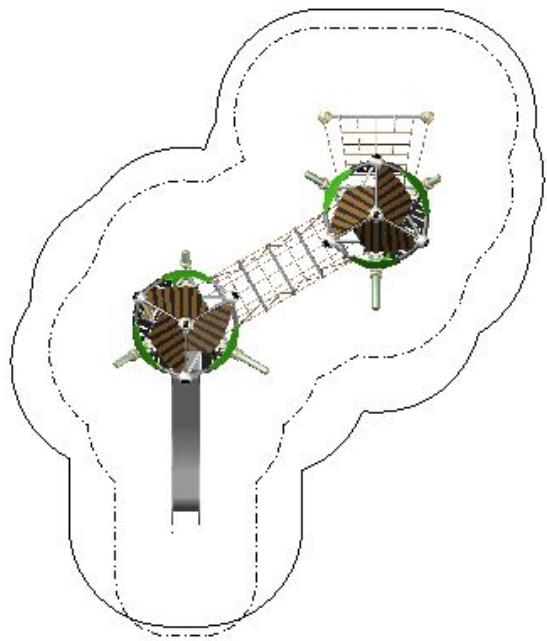

Berliner
 Berliner Seilfabrik
 Play Equipment Corporation
 96 Brookfield Oaks Drive, Suite 140
 Greenville, SC 29607

T + 1 864 627 1092
 F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com



Combi.102 – Product Specification



Technical Data.

The following text can also be used for tenders.

- 2 tree houses
- 1 access net
- 1 ladder
- 1 suspension bridge
- 1 straight box slide

Posts:

Steel pipes Ø 133 mm (5'-1/4"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; horizontal pipes are stainless steel Frameworkx-®tubes, Ø 60.3 mm (2 3/8"), wall thickness 2.0 mm (1/16")

Tube framework:

A combination of straight and bended stainless steel Frameworkx-®tubes, Ø 60,3 mm (2 3/8"), material AISI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint.

Connections:

Number of mechanical components as less as possible; all bolts and nuts exposing permanently to the weather consist of stainless steel

Bamboo panels:

Bamboo strips 90 mm, (3'-1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework

Nodes:

Frameworkx-aluminum ball connectors; Ø 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTM TT net tensioning system; securely closed with durable EPDM- caps

Access net:

Rope Ø 16 mm (5/8"), mesh size 300 x 300mm (11-13/16"x11-13/16"), rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic).

Ladder:

Ladder flange made out of stainless steel profile 60x20mm (2-3/8"x 3/4"), steps made out of Bamboo strips 90mm, (3 1/2").

Suspension bridge:

Rope Ø 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5" x 9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic); with in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps

Straight box slide:

Straight box slide made of stainless steel; the cheeks are welded with stainless steel handrails; afterwards smoothed and polished



Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com

Combi.102 – Product Specification




Berliner
Berliner Seilfabrik
Play Equipment Corporation
96 Brookfield Oaks Drive, Suite 140
Greenville, SC 29607

T + 1 864 627 1092
F + 1 864 627 1178

www.berliner-playequipment.com
info@berliner-seilfabrik.com