

# Speedway – Product Specification



## HodgePodge – A variety of study and durable sport and play elements

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.

### At a glance.

Product Family:	<b>HodgePodge</b>	Number of Foundations:	<b>4 pc.</b>
Item Number:	<b>97.110.004</b>	Concrete Volume C20/C25:	<b>6.2 m<sup>3</sup> (219.0 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.00 m (3'-4")</b>	Installation Time without foundation:	<b>10 hours</b>
Length x Width x Height:	<b>30.2 m x 2.2 m x 3.2 m (98'-11" x 7'-3" x 10'-5")</b>	Dimensions of largest part:	<b>Ø 0.1 x 3.2 m (Ø 0'-4" x 10'-6")</b>
Protective Surfacing Area (DIN EN 1176):	<b>30.2 m x 4.0 m</b>	Weight of heaviest part:	<b>120 kg (264.6 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>33.8 m x 5.9 m (110'-11" x 19'-2")</b>	Shipping Volume:	<b>5.3 m<sup>3</sup> (187.2 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>114.0 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>193.6 m<sup>2</sup> (2,083.9 ft<sup>2</sup>)</b>	Certificate according to EN 1176:	<b>Nr.: Z2.16.01.10256.247 vom TÜV Product Service</b>

  
**Berliner**  
 Berliner Seilfabrik GmbH & Co.  
 Lengeder Straße 2/4  
 D-13407 Berlin


Tel. +49.(0)30.41 47 24-0  
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
 www.berliner-seilfabrik.com

# Speedway – Product Specification



M 1:200

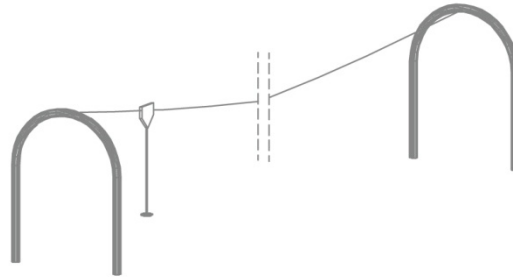

## Technische Details.

The following text can also be used for tenders.

### Cable:

Ø12 mm (1/2"), 17 x 7 mm (11/16" x 1/4"), similar DIN3069+SE with galvanized wires, for a gentle and durable run of the trolley. Robust tension device connected to both cable ends with turnbuckle M20. Heavy-duty stoppers featuring Polyamide-buffers at steel brackets; end station with rubber buffer and robust compression spring.

### Trolley:

Enclosed casing made from stainless steel, safety pendulum seat suspended from coated chain.

### Starting- (End-) station:

Arched steel construction with uprights 140 x 12.5 mm (5 1/2" x 1/2") and half-bend tubing 133 x 8.0mm (5 1/4" x 5/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.



  
**Berliner**

Berliner Seilfabrik GmbH & Co.  
Lengeder Straße 2/4  
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
www.berliner-seilfabrik.com